


DLP trunking for fluids

The DLP trunking system for fluids specially designed to hold and perfectly concealed pipes that are surface-mounted on walls. Its design with rounded lines guarantees an aesthetic appearance suitable for installation in any location and for any type of application

Description of the system

RANGE SUITABLE FOR ANY TYPE OF APPLICATION

- The system is ideal for air conditioning, heating and plumbing applications, with a range specially designed to contain and hold pipes in position in the trunking




FIXING PRINCIPLES SPECIFIC TO THE INSTALLATION

AIR CONDITIONING

- Flat base designed to conceal pipes with thermal protection. Delivered with pipe retainers
- Pipe support to fit pipes with thermal protection, and built-in cable tie


HEATING AND PLUMBING

- Pipe support to fit pipes from 10 to 22 mm in plumbing and heating installations





SPECIALIZED ACCESSORIES

- Wide range of accessories to meet the needs of every installation
- Specific accessories: straight and angled partition feedthrough specially for air conditioning, to provide an excellent finish




AESTHETIC, COMPACT TRUNKING

- The compact size of the trunking and its rounded lines provide a perfect integration. Flat base can easily be added, and it can be installed anywhere




INDOOR AND OUTDOOR APPLICATIONS

- Its design and the materials used make the trunking suitable for both indoor use and outdoor use



FLAT BASE FOR AIR CONDITIONING PIPES


- Base specially designed to take air conditioning pipes. The retainers, that can be placed anywhere on the base, enable the pipes to be pre-installed before being held in place by the cable tie



LEGRAND ADVANTAGES

- Range specially for air conditioning, heating and plumbing applications
- Quick and easy to install
- Aesthetic, attractive installation

DLP trunking for fluids 40 x 70 and 60 x 100
air conditioning and plumbing applications

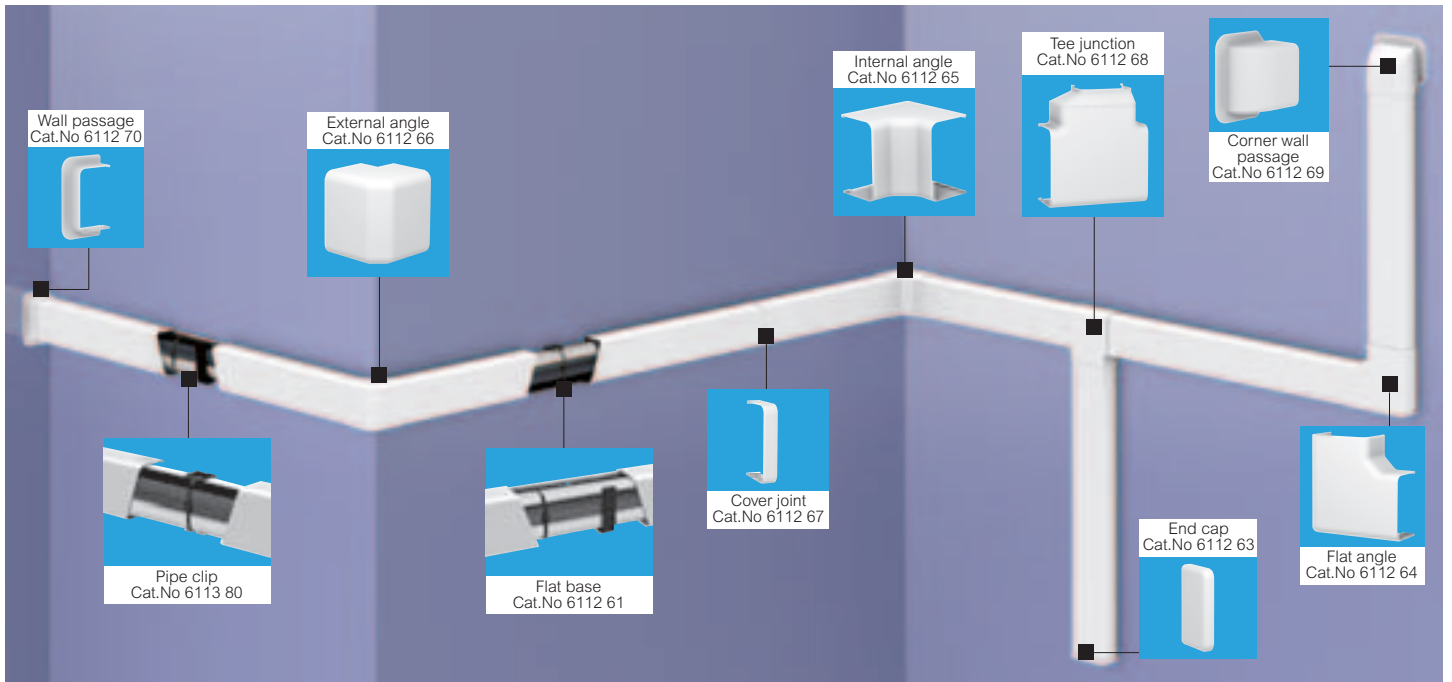

Pack	Cat.Nos		Trunking for air conditioning and plumbing pipes Trunking with cover According to the installation requires a flat base and cover support Cover Material PVC M1 White RAL 9016 Length 2 m Flat base with retainers for air conditioning installation Material PVC M1 White RAL 9016 Length 2 m Pipe clips Material Polypropylene For fitting air conditioning pipes with thermal protection Capacity 15 to 45 mm For pipes with diameters between 10 and 22 mm
40 ⁽¹⁾ 32 ⁽¹⁾	40 x 70 6112 60	60 x 100 6113 00	
40 ⁽¹⁾ 32 ⁽¹⁾	6112 61	6113 01	
50	6113 80		
50	6113 81		

Pack	Cat.Nos		Finishing accessories
10 5	40 x 70 6112 63	60 x 100 6113 03	
10 5	6112 64	6113 04	Flat angle
10 5	6112 65	6113 05	Internal angle
10 5	6112 66	6113 06	External angle
10 5	6112 67	6113 07	Cover joint
5 2	6112 68	6113 08	Tee junction
10 5	6112 70	6113 10	Wall passage
10 5	6112 69	6113 09	Corner wall passage
1	6113 11		Reduction


(1) Number of meters in pack

DLP trunking for fluids 40 x 70 and 60 x 100

air conditioning and plumbing applications

■ Composition of the installation

For an air conditioning installation:

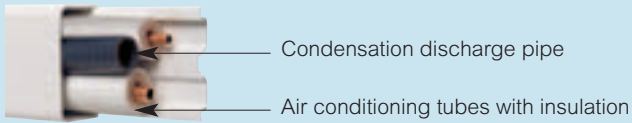


	Less than 3000 W		Between 3000 and 5000 W		Greater than 5000 W	
	Liquid	Gas	Liquid	Gas	Liquid	Gas
	1/4"	3/8"	1/4"	1/2"	3/8"	5/8"
	Ø 25 mm	Ø 28 mm	Ø 25 mm	Ø 31 mm	Ø 28 mm	Ø 34 mm
40 x 70 single split						
60 x 100 single and dual-split						

■ Selection of mounting method

	Air conditioning Application		Plumbing Application
40 x 70	6112 61	6113 80	6113 81
60 x 100	6113 01	6113 80	

■ Flat base installation


Cat.Nos 6112 61/6113 01



Easy assembly and alignment of flat bases



Oblong perforations in the bottom for quick fitting and easy adjustment of the base



Pipes can be pre-installed using pipe retainers positioned on the bottom as required, before being held in place by pipe ties

■ Pipe clip installation

Cat.No 6113 80



The installation supports can be adapted to fit 40 x 70 and 60 x 100 covers, and have reusable pipe clips to hold the pipes in place

■ Air conditioning installation

1-Fix the support to the wall :

With flat base
Cat.Nos 6112 61/6113 01



Fixing the base


With pipe clip
Cat.No 6113 80



Adjusting the support according to the size of the cover



Fixing the ties and/or clips for holding the pipes in place



It is recommended that pipe clips are fitted every 50 cm to ensure alignment

2-Place and hook the pipes with a pipe tie




3-Cover it with the trunking



■ Plumbing installation

With plumbing pipe clip

Cat.No 6113 81



The plumbing pipe clip for 40 x 70 cover can take pipes of different diameters, ranging from 10 to 22 mm