
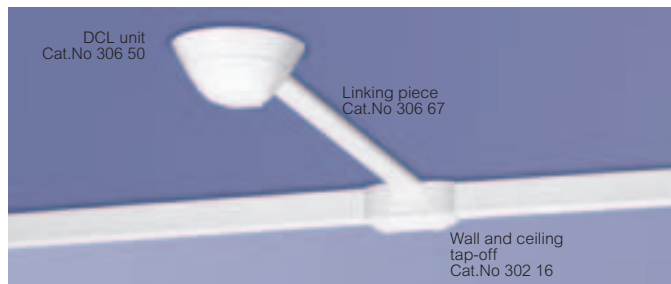


DLPlus mini-trunking frames and installation accessories

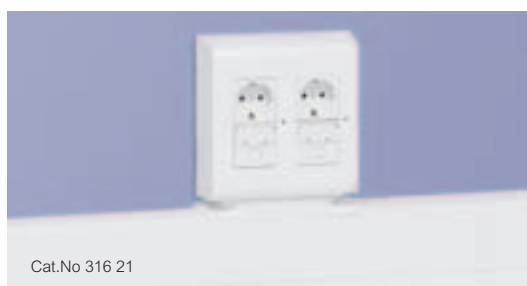

Pack	Cat.Nos	Mosaic frames
		Supplied with support, plate and divider for separation of currents Vertical or horizontal mounting For use with Mosaic 2 module sockets (p. 721)
10	316 11	2 modules
10	316 12	3 modules (for horizontal mounting only)
5	316 13	4 modules (for horizontal mounting only)
5	316 14	6 modules (for horizontal mounting only)
10	316 21 ⁽¹⁾	2 x 4 modules
10	316 22 ⁽¹⁾	3 x 4 modules

Pack	Cat.Nos	Junction boxes
		White
10	303 16	75 x 75 x 35 mm
10	303 26	110 x 110 x 50 mm
10	303 36	150 x 150 x 65 mm

Pack	Cat.Nos	BS wiring accessories frames
		For Mosaic British standard, Synergy wiring accessories (p. 464, 624)
		Installation alongside the trunking
5	317 92	1 gang 35 mm depth
5	317 95	2 gang 35 mm depth

Pack	Cat.Nos	60 mm fixing centres wiring accessories frames
		For Creo, Valena, Suno wiring accessories (p. 558, 564, 577)
		Installation alongside the mini-trunking Supplied with divider for separation of currents
5	316 94	1 gang, for vertical or horizontal mounting
5	316 95	2 gang, for horizontal mounting
5	316 96	3 gang, for horizontal mounting

Pack	Cat.Nos	Connection of luminaires
10	306 50	Plug-in ceiling rose unit supplied with connector Maximum suspended weight: 25 kg as long as unit is equipped with a suitable fixing device
135 ⁽²⁾	306 67	Linking piece between the above unit and the ring profile Length 3 m
10	302 16	Wall and ceiling tap-off for 40 x 20 mini-trunking
10	302 26	Wall and ceiling tap-off for 60/75 x 20 mini-trunking
10	333 17	Wall and ceiling tap-off for 32 x 12.5 mini-trunking
10	333 29	Wall and ceiling tap-off for 32 x 16 mini-trunking

Pack	Cat.Nos	Cutting accessories for profiles
1	306 98	DLPlus cutting unit For cutting all plastic profiles Avoids vibration when cutting bases and covers Aluminium Dim.: 225 x 142 x 76 mm

Pack	Cat.Nos	Insulation accessory
10	304 18	Base joint Adjustable wall insulation joint, supplied in 5 m lengths Provides continuity between the profile and the wall, in particular in internal angles

Pack	Cat.Nos	Fixing accessories for profiles
		For fixing all plastic profiles
		Wall plugs for immediate fixing No screws or nails required
100	308 98	For mini-trunking
100	308 99	For mini-trunking, skirting trunking and trunking
		Cartridge of Neoprene
12	309 49	Adhesive for glue gun
		DLP rapid wall plug
200	308 97	For 10 mm min. plasterboard walls at least 20 mm away from the concrete surface For fixing DLP plastic trunking in a single operation Used with a special tool for drill (Ø 8 mm), supplied in each pack of 200 wall plugs Tensile resistance: 25 kg

(1) Can be illuminated with LED Cat.No 899 06
(2) Number of meters in pack