


NEW

floor boxes and underfloor boxes for raised or concrete floors

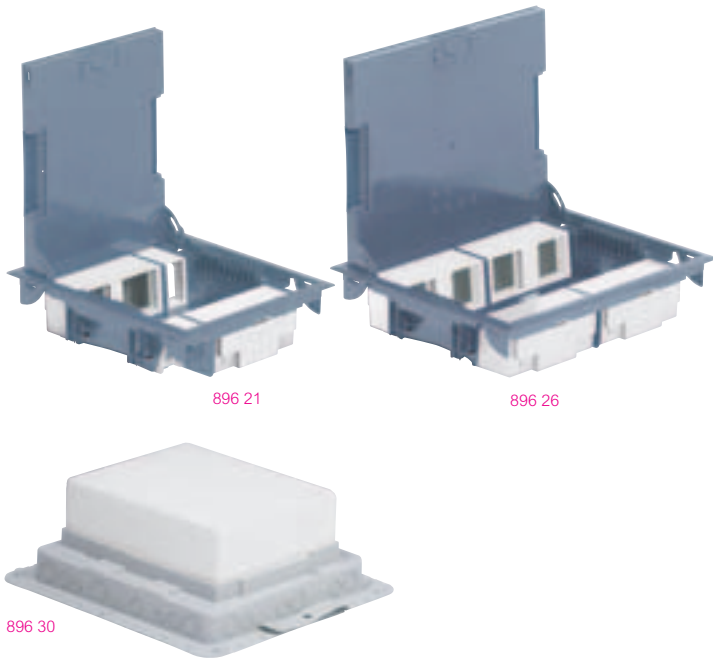

896 21

896 26

896 30


Pack Cat.Nos Floor boxes with height reduced to 65 mm

Conform to standard NF EN 60 670
For technical space ≥ 65 mm
For renovation with reduced height technical floor or for concrete floor
Supplied with reversible stainless steel cover or cover for carpet or parquet
Mounting boxes (for vertical wiring device positioning):
- supplied with blanking plates requiring sufficient space between the sockets if angled plugs are used
- to be equipped with 2 module Mosaic socket outlets (see p. 624, 625)
- takes marking labels
- ensures perfect cable separation
Easy opening cover by rings and holding in open position during connection

10 modules to be equipped

For installing 4x2 modules Mosaic and 2x1 module Mosaic


- 1 **896 20** With stainless steel cover, grey RAL 7031
- 1 **896 21** With cover for carpet, grey RAL 7031
- 1 **896 22** With cover for carpet, beige RAL 1019



16 modules to be equipped

For installing 8x2 modules Mosaic


- 1 **896 25** With stainless steel cover, grey RAL 7031
- 1 **896 26** With cover for carpet, grey RAL 7031
- 1 **896 27** With cover for carpet, beige RAL 1019



Plastic underfloor boxes

For integration of floor boxes in concrete floor installations
Power supply by flexible conduits $\varnothing 16$, 20 and 25 mm
Supplied with polystyrene for easy installation (see opposite)

- 1 **896 30** For integration of floor boxes 12 modules, or floor boxes with reduced height 10 modules
- 1 **896 31** For integration of floor boxes 18 modules
- 1 **896 32** For integration of floor boxes 24 modules, or floor boxes with reduced height 16 modules




Metal underfloor boxes (p. 745)

floor boxes and underfloor boxes for raised or concrete floors




Installation principles

Installation



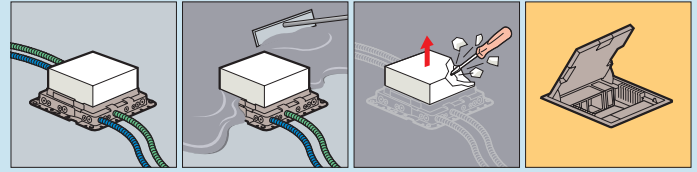


Positioning wiring accessories


In floor boxes with adjustable height 75 to 105 mm



In floor boxes height 65 mm



Choice of plastic underfloor box according to the floor box to be installed

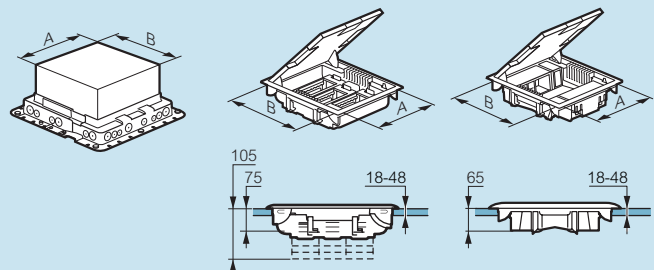

Cat.Nos	A (mm)	B (mm)
896 05/06/07/20/21/22	215	255
896 10/11/12	255	255
896 15/16/17/25/26/27	310	255