

SYNERGY™



PROVEN
QUALITY



CATALOGUE
PAGES
→ INSIDE

THE **GLOBAL SPECIALIST**
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand**®

SYNERGY™

EXPERIENCE OUR COMPANY VALUES

Sharing the same values means meeting our customers' expectations in terms of choice, quality and budget.

That's why the Synergy range, well known for its durability and functionality, sets the standard in the residential sector in offering maximum comfort to users.

Share in Synergy values over the following pages...



CONTENTS

Quality & safety	2
Choice & flexibility	4
A sense of family	6
Synergy White	8
Synergy Traditional	10
Synergy Modern	12
Synergy Flat Plate	14
Synergy Metalclad	16
Catalogue pages	18



QUALITY & SAFETY OF KNOWN VALUES

DESIGNED FOR EASE OF INSTALLATION

Quality and safety are the strong points of the Synergy family. Synergy offers all the advantages of the British standard to ensure comfort and safety for the professional and for the user, from the component design stage right through to installation. Monobloc products with a compact mechanism, optimised cabling area, large and easy-to-access terminals, clear laser marking, etc.

Unique LED kits for location or power indication. invisible until activated

Large contoured rockers with positive click action

Elegant slim contours across the range



Advanced safety shutter




Supplied with screw caps




Compact mechanisms for maximised wiring space

Large angled terminal entries

Fixing screws maintained by earth strap

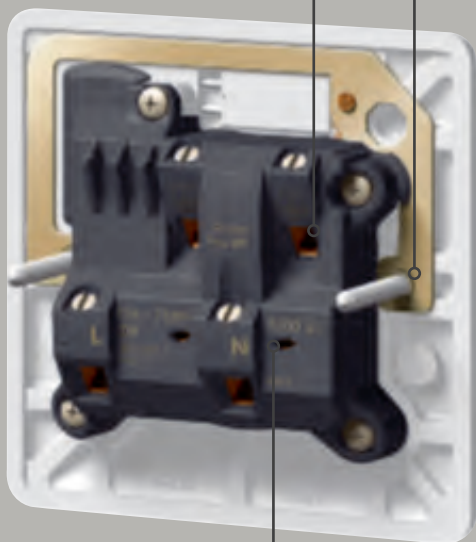

Clear and comprehensive laser marking

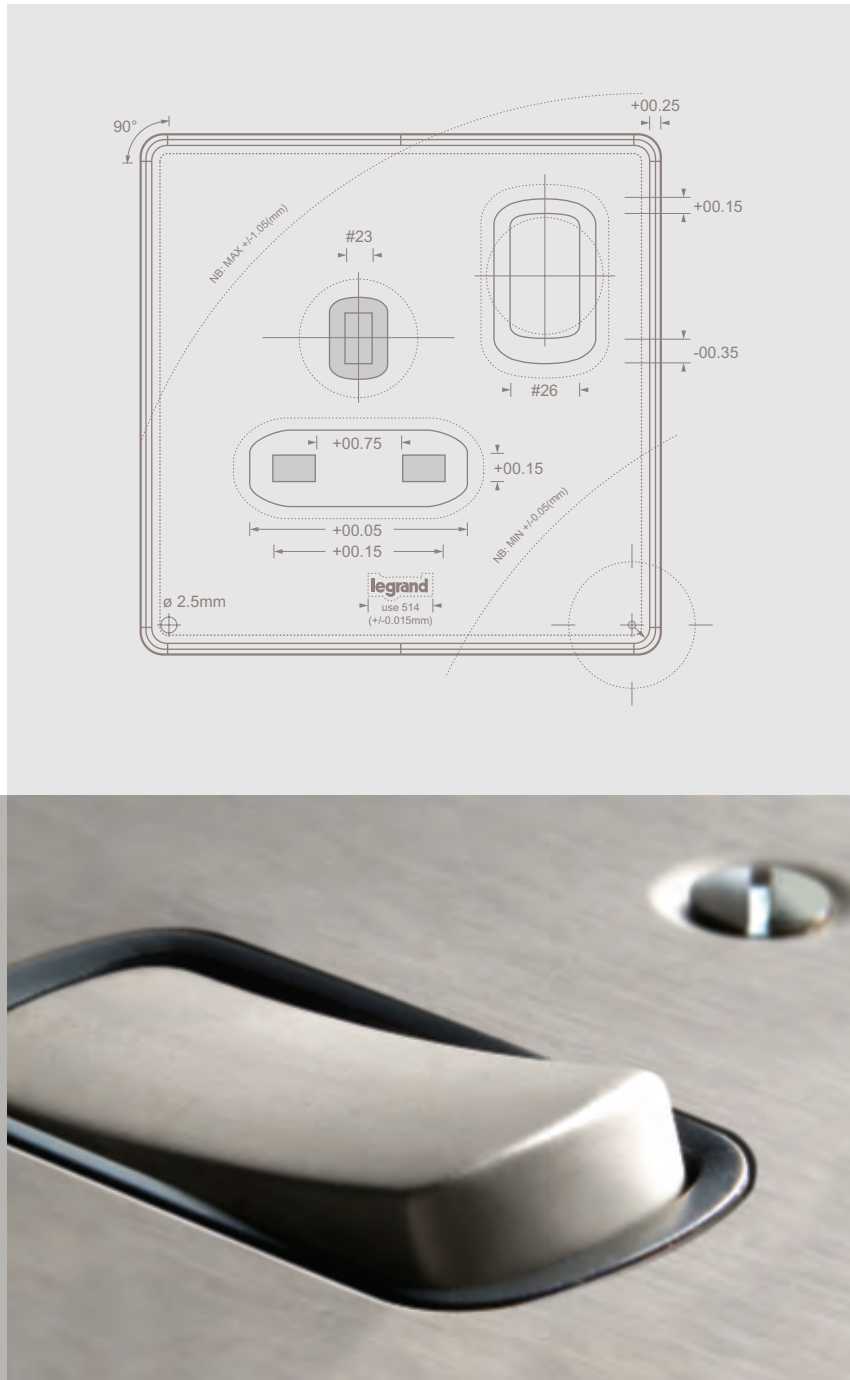

FREEDOM, WITH OPTIONS AND FLEXIBILITY

NUMEROUS FUNCTIONS AND MULTIPLE COMBINATIONS

The Synergy family has all the essential functions, from conventional control to sockets for high or low currents. For even more functional features, 2 complementary solutions have been added: Integration of the Arteor mechanisms or use of Grid plates and mechanisms.



remplacer par la réf. 733459 dispo dans la base



RECOGNISED STANDARDS

Synergy offers a complete range of sockets in many international standards, as well as some special functions such as the shaver socket.



Single master telephone socket



SYNERGY AND ARTEOR

The Synergy adaptors enable the mechanisms of the Arteor range to be integrated into all the finishes of the Synergy range to give even more functional features.



SYNERGY AND GRID SYSTEM

The dedicated Grid System plates combine Grid modules to centralise multiple functions from a single control point. The plates are available in the various families of the Synergy range and can go up to 24 modules (3 x 6 modules)



Twin RJ 45 data sockets
Cat 6



TV + FM socket

MULTIMEDIA FUNCTIONS

The Synergy collection includes a full range of multimedia sockets (internet connection, telephone, TV, etc.) to keep you connected throughout the home.

A SENSE OF FAMILY, A NATURAL VALUE

RESPECTING EACH PERSON'S TASTES

The philosophy of the Synergy family is based on respect for the tastes and needs of individuals, sharing their living space in harmony. The product range will satisfy everyone's performance preferences and expectations, not just in terms of colour schemes, but in terms of style and quality.

WHITE




White plastic



TRADITIONAL



MODERN



FLAT PLATE



METALCLAD



Brushed Stainless Steel



Silver



Brushed Stainless Steel



Grey epoxy resin



Polished Stainless Steel



Nickel




Antique Brass



Brushed Satin Brass

SYNERGY™ WHITE

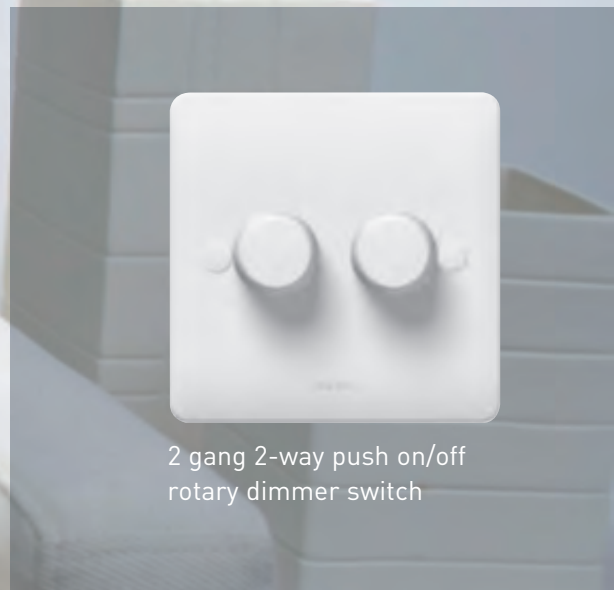

2 gang 2-way push on/off
rotary dimmer switch

THE VALUE OF PURITY, TIMELESS AND REFINED

Synergy White can illuminate any interior with its modern, simple and refined design. Profiled plates, flush-mounted screw covers or unique LED kits, for location or power indication invisible unit activated.



Double pole switch with red LED power indicator



Twin RJ 45 data sockets Cat 6



2 gang double pole switched socket outlet



SYNERGY™ TRADITIONAL



1 gang double pole switched
socket outlet Satin Brass

A VALUE AS DURABLE AS METAL ITSELF

The core of Synergy Traditional lies in its combination of the durability of metal, brass or stainless steel with sober and classic design, suggestive of serenity. With 3 finishes, the range offers a wide choice of functions to ensure maximum comfort.



Single pole 2 gang 2-way switch
Satin Brass



Screened TV and FM socket
Polished Stainless Steel



3-pole isolator switch
Brushed Stainless Steel



45 A 1 gang double pole switch
red LED power indicator
Brushed Stainless Steel

SYNERGY™ MODERN



3 gang 2-way switch Silver

A SUBTLE VALUE WITH REFINED MODERNITY

Synergy Modern in metal combines the contemporary style of silver and the traditional warmth of brass. Identical colour rockers, plates without visible screws, everything is designed for delicate moments of refined relaxation



1 gang 1-way switch Silver



20 A double pole switch
+ red LED power indicator
Nickel



2 gang double pole switched socket outlet
with red LED power indicator Nickel



SYNERGY™

FLAT PLATE



1 gang 1-way switch
Antique Brass

A DEMANDING VALUE WITH CONTEMPORARY ELEGANCE

Synergy Flat Plate, with its extra-flat design, takes its place as a unique model of contemporary elegance. The Flat Plate family is part of the current fashion for very flat objects, television sets or mobile telephones, which reflect the evolution of new generation technologies.



Double pole switched
socket outlet + red LED
power indicator Antique Brass



20 A double pole switch
+ red LED power indicator
Brushed Stainless Steel



TV socket Brushed
Stainless Steel

SYNERGY™ METALCLAD



3 gang 2-way switch

A FUNDAMENTAL VALUE WITH PROVEN STURDINESS

Synergy Metalclad with its metal finish and essential functions takes pride of place in the ancillary spaces (garage, basement/cellar, etc.). The plates adjust perfectly onto the surface mounted boxes, to ensure smooth angles.



Single pole 1 gang 1-way plate switch



Double pole 2 gang switched socket outlet



Double pole switched connection unit



Synergy™ single pole switches, single pole push and key switches, rotary dimmers - white



7 300 00



7 300 06



7 301 56



Flush and surface mounting boxes

p. 23

Front plates: white thermoset
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with faceplate screw caps

Pack	Cat.Nos	Single pole plate switches 10 AX - 250 V \sim
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep ASTA licence
		Nominal plate dimensions: 86 x 86 mm
10	7 300 00	1 gang - 1 way
10	7 300 01	1 gang - 2 way
10	7 300 05	1 gang - intermediate
10	7 300 24	2 gang - 1 way
10	7 300 02	2 gang - 2 way
10	7 301 24	3 gang - 1 way
10	7 300 03	3 gang - 2 way
		Nominal plate dimensions: 86 x 146 mm
5	7 300 04	4 gang - 2 way
5	7 300 06	6 gang - 2 way

Pack	Cat.Nos	Single pole plate switches 20 AX - 250 V \sim
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep Nominal plate dimensions: 86 x 86 mm
10	7301 30	1 gang - 1 way
10	7301 31	1 gang - 2 way
10	7301 34	2 gang - 1 way
10	7301 32	2 gang - 2 way
10	7301 35	3 gang - 1 way
10	7301 33	3 gang - 2 way

Pack	Cat.Nos	Single pole push switches 10 A - 250 V \sim
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep ASTA licence
		Nominal plate dimensions: 86 x 86 mm
5	7 300 07	1 gang - 2 way push switch
5	7 300 11	1 gang - 2 way push switch marked "PRESS"
5	7 301 07	1 gang - 2 way push switch with bell symbol

Pack	Cat.Nos	Single pole key switch 10 AX - 250 V \sim
		Conform to BS EN 60669-1: 2000 Key supplied For flush-mounting, back box to be min. 16 mm deep Nominal plate dimensions: 86 x 86 mm
10	7 300 08	1 gang - 2 way

Pack	Cat.Nos	Push on/off rotary dimmers 400 W 100 - 240 V \sim - 50/60 Hz
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 25 mm deep
		Nominal plate dimensions: 86 x 86 mm
1	7 301 56	1 gang - 2 way
1	7 301 57	2 gang - 2 way
		Nominal plate dimensions: 86 x 146 mm
1	7 300 49	4 gang - 2 way

Pack	Cat.Nos	Rotary dimmer 1000 W - 100 - 240 VA - 50/60 Hz
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 25 mm deep 60-100 W for incandescent and halogen lamps 230 V 60-100 VA for halogen lamps with ferromagnetic transformers and control electronic transformers with leading edge behaviour, max. 600 VA Installation without neutral
		Nominal plate dimensions: 86 x 86 mm
1	7 301 50	1 gang

Synergy™ double pole switches - white



7 301 10

7 300 22

Front plates: white thermoset
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with faceplate screw caps

Synergy™ telephone, data and TV sockets - white



7 300 50

7 300 57

7 300 43

Front plates: white thermoset
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with faceplate screw caps

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10	7 300 10	Conform to BS EN 60669-1 For flush-mounting, back box to be min. 25 mm deep Use cord outlet accessory box Cat.No 7 300 53 for external cord outlet ASTA licence Nominal plate dimensions: 86 x 86 mm DP switch
10	7 300 12	DP switch + red LED power indicator LED invisible until activated
10	7 301 10	DP switch marked "WATER HEATER"
10	7 301 12	DP switch marked "WATER HEATER" + red LED power indicator LED invisible until activated

Pack	Cat.Nos	Double pole switches 45 A - 250 V~
10	7 300 22	Conform to BS EN 60669-1 ASTA licence For flush-mounting, back box to be min. 45 mm deep Nominal plate dimensions: 86 x 86 mm DP switch
10	7 300 23	DP switch + red LED power indicator LED invisible until activated
10	7 301 22	DP switch red rocker marked "COOKER"
5	7 300 20	Nominal plate dimensions: 146 x 86 mm DP switch
5	7 300 21	DP switch + red LED power indicator LED invisible until activated
5	7 301 20	DP switch red rocker marked "COOKER"

Pack	Cat.Nos	Telephone sockets
10	7 300 50	For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm UK master
10	7 300 51	UK secondary
10	7 300 54	RJ 11/RJ 12 - single
1	7 300 56	Data sockets - Cat. 6 Rapid cable connection For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm RJ 45 - single
1	7 300 57	RJ 45 - twin

Pack	Cat.Nos	Television sockets
10	7 300 40	For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm Screened TV socket single - male
10	7 301 40	Screened TV socket single - female
10	7 301 44	Screened TV socket single pass trough - female
10	7 301 45	Screened TV socket single terminal - female
1	7 300 41	SAT socket single - "F" type
10	7 300 42	TV-R socket
1	7 300 43	TV-R-SAT socket "F" type

Synergy™ British standard socket outlets - white



7 300 65



7 300 60



7 300 70

Front plates: white thermoset
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with faceplate screw caps

Pack	Cat.Nos	Socket outlets 13 A - 250 V~
		Conform to BS 1363: Part. 2 For flush-mounting, back box to be min. 25 mm deep ASTA licence
10	7 300 65	Unswitched 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 75	2 gang Nominal plate dimensions: 86 x 146 mm
		Single pole - switched Fitted with traditional earth pin release shutter and single earth terminal
10	7 300 66 ¹	1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 76 ¹	2 gang Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	Socket outlets 13 A - 250 V~ Special earth pin
		For flush-mounting, back box to be min. 25 mm deep
10	7 300 67 ¹	Double pole - switched 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 77 ¹	2 gang Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	Double pole socket outlets 13 A - 250 V~
		Conform to BS 1363: Part. 2 Patented 3 pin safety shutters mechanism 2 earth terminals For flush-mounting, back box to be min. 25 mm deep ASTA licence
10	7 300 60	Switched 1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 70	2 gang Nominal plate dimensions: 86 x 146 mm
		Switched with red LED power indicator LED invisible until activated
10	7 300 61	1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 71	2 gang Nominal plate dimensions: 86 x 146 mm
		Switched for standard and clean earth applications
10	7 300 64	1 gang Nominal plate dimensions: 86 x 86 mm
5	7 300 74	2 gang Nominal plate dimensions: 86 x 146 mm
		Switched with red rocker
10	7 301 62	1 gang Nominal plate dimensions: 86 x 86 mm
5	7 301 61	2 gang Nominal plate dimensions: 86 x 146 mm

1 : Non-SASO products

Synergy™ British standard socket outlets - white (continued)



7 300 89



7 300 69

Front plates: white thermoset
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with faceplate screw caps

Pack	Cat.Nos	Socket outlets 15 A - 250 V \sim
10	7 300 88 ¹	Conform to BS 546 Patented 3 pin safety shutters mechanism For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched
10	7 300 89 ¹	1 gang - switched, single pole

Pack	Cat.Nos	Sockets outlets 15 A - 127 V \sim - SASO
5	7 300 85	Conform to SASO No LIC 203182 Standard terminal screws For flush-mounting, back box to be min. 35 mm deep 1 gang unswitched Nominal plate dimensions: 86 x 86 mm
5	7 300 86	2 gang unswitched Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	Socket outlets 5 A - 250 V \sim
10	7 300 68 ¹	Conform to BS 546 Patented 3 pin safety shutter mechanism For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched
10	7 300 69 ¹	1 gang - switched, single pole

Pack	Cat.Nos	Socket outlet 2 A - 250 V \sim
10	7 300 59 ¹	Conform to BS 546 For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched

Synergy™ Euro-US, German standard socket outlets and shaver socket - white



7 300 84



7 300 83



7 300 87

Front plates: white thermoset
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with faceplate screw caps

Pack	Cat.Nos	Socket outlet combined UK / Euro - US 13 A - 10/16 A
10	7 300 84 ¹	For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched UK - 13 A / EURO-US - 10/16 A - 250 V \sim

Pack	Cat.Nos	Euro - US socket outlets
10	7 300 80 ¹	For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86 x 86 mm 10 A - 127 V \sim 16 A - 250 V \sim 1 gang - unswitched
10	7 300 81 ¹	2 gang - unswitched
10	7 300 82 ¹	1 gang - switched
10	7 300 83 ¹	1 gang - unswitched + 10 AX 1 way switch

Pack	Cat.Nos	German standard socket outlet 10/16 A - 250 V \sim
10	7 300 87 ¹	For flush-mounting, back box to be min. 35 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched

Pack	Cat.Nos	Shaver socket
1	7 300 90	Conform to BS EN 61558-2-5 Suitable for use with European, British and Australian 2 pin plugs Rating: 20 VA IP 24 Screwless live and neutral terminals For flush-mounting, back box to be min. 45 mm deep Nominal plate dimensions: 146 x 86 mm 240 V - 120 V \sim - 50/60 Hz

Synergy™ cooker control units, fused connection units and cable outlets - white



7 300 29



7 300 26

Front plates: white thermoset
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with faceplate screw capswwwww

Pack	Cat.Nos	Cooker control units 250 V~
5	7 300 28	Conform to BS 4177 For flush-mounting, back box to be min. 45 mm deep Nominal plate dimensions: 86 x 146 mm 45 A DP switch + 13 A DP switched socket outlet
5	7 300 29	45 A DP switch + 13 A DP switched socket outlet + red LED power indicator LED invisible until activated

Pack	Cat.Nos	Fused connection units 13 A - 250 V~
10	7 300 32	Conform to BS 1363: Part 4 Fused 13 A (fuse supplied) Front cable outlet with cord grip Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 86x86 mm Unswitched With cord outlet
10	7 300 33	With red LED power indicator LED invisible until activated
10	7 300 36	Double pole switched With cord outlet
10	7 300 37	With red LED power indicator and cord outlet LED invisible until activated

Pack	Cat.Nos	Cable outlets
10	7 300 19	Conform to BS 5733 Fitted with cable clamp and outlet membrane Nominal plate dimensions: 86x86 mm 20 A - 250 V~ For flush-mounting, back box to be min. 35 mm deep With terminal block
5	7 300 26	45 A - 250 V~ For flush-mounting, back box to be min. 45 mm deep With terminal block

Synergy™ blanking plates, front plates for Arteor mechanisms



7 300 96



7 300 92

Pack	Cat.Nos	Blanking plates
10	7 300 95	1 gang Nominal plate dimensions: 86x86 mm
10	7 300 96	2 gang Nominal plate dimensions: 86x146 mm

Pack	Cat.Nos	Front plates for Arteor mechanisms
10	7 300 91	Clip-in carrier plates - No yoke required 1 gang for 1 Arteor module Nominal plate dimensions: 86x86 mm
10	7 300 92	1 gang for 2 Arteor modules Nominal plate dimensions: 86x86 mm
10	7 300 93	2 gang for 3 Arteor modules Nominal plate dimensions: 86x146 mm
10	7 300 94	2 gang for 4 Arteor modules Nominal plate dimensions: 86x146 mm
10	7 301 88	Yoke required 2x2 gang for 8 Arteor modules Nominal plate dimensions: 146x146 mm To be equipped with 2 yokes Cat.No 7 354 74
10	7 301 90	3x3 gang for 18 Arteor modules Nominal plate dimensions: 267x207 mm To be equipped with 3 yokes Cat.No 7 354 76

Pack	Cat.Nos	Yokes for front plates for Arteor mechanisms
10	7 354 74	For 4 Arteor modules
15	7 354 76	For 6 Arteor modules

flush-mounting steel back boxes



0 891 09



7 364 06



7 364 11

Synergy™ accessories and surface mounting boxes - white



7 364 06



7 301 58



7 364 11

Pack	Cat.Nos	Flush-mounting back boxes
		Conform to BS 4662 Material: galvanised steel Top, side and back knockout entries according to each size of box
200	0 891 09	Depth 16 mm 1 gang with: 1 fixed lug, 1 adjustable lug and 1 earth terminal
100	0 891 10	Depth 25 mm 1 gang with: 3 fixed lugs, 1 adjustable lug and 1 earth terminal
60	0 891 11	2 gang with: 1 fixed lug, 1 adjustable lug and 1 earth terminal
100	0 891 13	Depth 35 mm 1 gang with: 3 fixed lugs, 1 adjustable lug and 1 earth terminal
40	0 891 14	2 gang with: 1 fixed lug, 1 adjustable lug and 1 earth terminal
40	0 891 40	Dual box with: 2 earth terminals Accepts 2 single gang accessories
50	0 891 17	Depth 48 mm 1 gang with: 3 fixed lugs, 1 adjustable lug and 1 earth terminal
50	0 891 18	2 gang with: 1 fixed lug, 1 adjustable lug and 1 earth terminal

Pack	Cat.Nos	Accessories
		Electronic LED All relevant Synergy functions are designed to accept the LED packs for fitting at time of installation or retrospectively by qualified person Can be used with fluorescent light
10	7 301 58	Electronic LED locator pack green diodes: max. current 0.2 mA provides illumination to locate function such as switches in low light
10	7 300 58	Electronic LED power indicator pack red diodes: nominal current 2 mA provides indication of "power on" condition in such functions as sockets and control switches
10	7 300 53	Cord outlet 1 gang box Nominal plate dimensions: 86 x 86 mm
		Surface-mounting moulded boxes
10	7 364 06	1 gang, 35 mm deep 86 x 86 mm
10	7 364 07	1 gang, 50 mm deep and cable grip 86 x 86 mm
5	7 364 10	2 gang, 35 mm deep 86 x 146 mm
5	7 364 11	2 gang, 50 mm deep and cable grip 86 x 146 mm
5	7 364 13	2 x 1 gang, 35 mm deep 86 x 172 mm

Synergy™ Modern

Blending the contemporary style of silver and nickel with the traditional warmth of brass, Synergy's Modern accessories help create relaxing environments where everyone feels at home

FORM AND FUNCTION IN PERFECT HARMONY

- Contemporary metal plates with hidden screws
- Terminal screws captive and backed off ready for cabling




▶▶▶ Silver and Nickel, p. 24



▶▶▶ Grid system, p. 44

+ MORE INFORMATION



▶ www.legrand.com

Synergy™ single pole switches - Modern



7 310 00



7 310 02



7 310 07

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space

Pack	Cat.Nos	Single pole plate switches 10 AX - 250 V~
1	7 310 00	Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep 1 gang - 1-way switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 00	
1	7 310 01	1 gang - 2-way switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 01	
1	7 310 05	1 gang - intermediate switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 05	
1	7 310 02	2 gang - 2-way switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 02	
1	7 310 03	3 gang - 2-way switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 03	
1	7 310 04	4 gang - 2-way switch Nominal plate dimensions: 89 x 149 mm ● Silver ● Nickel
1	7 312 04	
1	7 311 31	Single pole plate switches 20 AX - 250 V~ Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep 1 gang - 2-way switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 313 31	
1	7 311 32	2 gang - 2-way switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 313 32	
1	7 310 07	Single pole push switches 10 A - 250 V~ Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep 1 gang - 2-way push switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 07	

Synergy™ dimmers, isolator switches and double pole switches - Modern



7 313 57



7 312 09



7 310 10



7 310 12



7 310 23

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space

Pack	Cat.Nos	Push on/off rotary dimmers 400 W 100 - 240 V\sim - 50/60 Hz
1	7 311 56	Conform to BS EN 60669-1-2 For flush-mounting, back box to be min. 25 mm deep 1 gang - 2-way Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 313 56	
1	7 311 57	2 gang - 2-way Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 313 57	
1	7 310 09	Isolator switches 10 A - 250 V\sim Conform to BS EN 60947-3: 1992 Switch locking feature For flush-mounting, back box to be min. 16 mm deep White rocker 3-pole isolator switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 09	

Pack	Cat.Nos	Double pole switches 20 A - 250 V\sim
1	7 310 10	Conform to BS EN 60669-1 For flush-mounting, back box to be min. 25 mm deep DP switch Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 10	
1	7 310 16	DP switch + cord outlet + red LED power indicator LED invisible until activated Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 16	
1	7 310 12	DP switch + red LED power indicator LED invisible until activated Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 12	
1	7 310 23	Double pole switches 45 A - 250 V\sim Conform to BS EN 60669-1 For flush-mounting, back box to be min. 45 mm deep Red rocker DP switch + red LED Led invisible until activated Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 23	

Synergy™ telephone, data and television sockets - Modern



7 310 50








7 312 54





7 310 57

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space

Pack	Cat.Nos	Telephone sockets
		For flush-mounting, back box to be min. 35 mm deep
		UK master Nominal plate dimensions: 89 x 89 mm
1	7 310 50	 ● Silver
1	7 312 50	● Nickel
		UK secondary Nominal plate dimensions: 89 x 89 mm
1	7 310 51	 ● Silver
1	7 312 51	● Nickel
		RJ 11 / RJ 12 - single Nominal plate dimensions: 89 x 89 mm
1	7 310 54	 ● Silver
1	7 312 54	● Nickel

Pack	Cat.Nos	Television sockets
		For flush-mounting, back box to be min. 35 mm deep Screened
		TV socket - single male Nominal plate dimensions: 89 x 89 mm
1	7 310 40	 ● Silver
1	7 312 40	● Nickel
		SAT socket - single "F" type Nominal plate dimensions: 89 x 89 mm
1	7 310 41	 ● Silver
1	7 312 41	● Nickel

Pack	Cat.Nos	Data sockets Cat. 6
		Rapid cable connection For flush-mounting, back box to be min. 35 mm deep
		RJ 45 - single Nominal plate dimensions: 89 x 89 mm
1	7 310 56	 ● Silver
1	7 312 56	● Nickel
		RJ 45 - twin Nominal plate dimensions: 89 x 89 mm
1	7 310 57	 ● Silver
1	7 312 57	● Nickel

Synergy™ British standard socket outlets - Modern



7 310 60



7 312 61



7 312 71



7 310 89

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space

Pack	Cat.Nos	Socket outlets 13 A - 250 V \sim
1	7 310 65	Conform to BS EN 1363: Part. 2 Patented 3 pin safety shutters mechanism 2 earth terminals For flush-mounting, back box to be min. 35 mm deep 1 gang unswitched Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 65	
1	7 310 75	2 gang unswitched Nominal plate dimensions: 89 x 149 mm ● Silver ● Nickel
1	7 312 75	

1	7 310 60	Double pole socket outlets 13 A - 250 V\sim Conform to BS EN 1363: Part. 2 Patented 3 pin safety shutters mechanism 2 earth terminals Rapid cable connection For flush-mounting, back box to be min. 25 mm deep 1 gang switched Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 60	
1	7 310 61	1 gang switched with red LED LED invisible until activated Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 61	
1	7 310 70	2 gang switched Nominal plate dimensions: 89 x 149 mm ● Silver ● Nickel
1	7 312 70	
1	7 310 71	2 gang switched with red LED LED invisible until activated Nominal plate dimensions: 89 x 149 mm ● Silver ● Nickel
1	7 312 71	

Pack	Cat.Nos	Socket outlets 15 A - 250 V \sim
1	7 310 89 ¹	Conform to BS 546 Patented 3 pin safety shutters mechanism For flush-mounting, back box to be min. 35 mm deep 1 gang switched Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 89 ¹	

Pack	Cat.Nos	Socket outlets 15 A - 250 V \sim SASO
1	7 310 85	Conform to SASO No. LIC 203182 For flush-mounting, back box to be min. 35 mm deep 1 gang unswitched Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 85	
1	7 310 86	2 gang unswitched Nominal plate dimensions: 89 x 149 mm ● Silver ● Nickel
1	7 312 86	

Pack	Cat.Nos	Socket outlets 5 A - 250 V \sim
1	7 310 68 ¹	Conform to BS 546 Patented 3 pin safety shutters mechanism For flush-mounting, back box to be min. 25 mm deep 1 gang unswitched Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 68 ¹	
1	7 310 69 ¹	1 gang switched Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 69 ¹	

1 : Non-SASO products

Synergy™ fused connection units - Modern



7 312 30



7 310 33



7 312 34



7 310 35

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space

Pack	Cat.Nos	Fused connection units unswitched 13 A - 250 V~
1	7 310 32	Unswitched - with cord outlet Conform to BS 1363: Part. 4 Front cable outlet with cord grip Fuses supplied Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 32	
1	7 310 30	Unswitched - without cord outlet Conform to BS 1363: Part. 4 Front cable outlet with cord grip Fuses supplied Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 30	
1	7 310 31	Unswitched - with red LED power indicator LED invisible until activated Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 31	
1	7 310 33	Unswitched - with red LED power indicator + cord outlet LED invisible until activated Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 33	

Pack	Cat.Nos	Fused connection units switched 13 A - 250 V~
1	7 310 34	DP switched - without cord outlet Conform to BS 1363: Part. 4 Front cable outlet with cord grip Fuses supplied Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 25 mm deep Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 34	
1	7 310 35	DP switched - with red LED power indicator LED invisible until activated Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 35	
1	7 310 37	DP switched - with red LED power indicator + cord outlet LED invisible until activated Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 37	

Synergy™ shaver sockets, cooker control units and cable outlets - Modern



7 310 29



7 312 19

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space

Pack	Cat.Nos	Shaver sockets
1	7 310 90	Conform to BS EN 61558-2-5 Suitable for use with European, British and Australian 2 pin plugs Rating: 20 VA IP 24 Screwless live and neutral terminals For flush-mounting, back box to be min. 45 mm deep 240 V / 120 V - 50/60 Hz Nominal plate dimensions: 149 x 89 mm ● Silver ● Nickel
1	7 312 90	

Pack	Cat.Nos	Cooker control units - 250 V~
1	7 310 29	Conform to BS 4177: 1992 For flush-mounting, back box to be min. 47 mm deep 45 A DP switch + 13 A DP switched socket outlet Nominal plate dimensions: 89 x 149 mm ● Silver ● Nickel
1	7 312 29	

Pack	Cat.Nos	Cable outlets
1	7 310 19	Conform to BS 5733 Fitted with clamp and outlet membrane 20 A - 250 V~ Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 19	
1	7 310 26	45 A - 250 V~ Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 26	

Synergy™ blanking plates, cord outlets, front plates for Arteor mechanism - modern



7 310 95



7 310 52



7 310 92

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space

Pack	Cat.Nos	Blanking plates
1	7 310 95	1 gang Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 95	
1	7 310 96	2 gang Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 96	

Pack	Cat.Nos	Cord outlets
1	7 310 52	1 gang Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 52	

Pack	Cat.Nos	Front plates for Arteor mechanisms
1	7 310 91	1 gang for 1 Arteor module Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 91	
1	7 310 92	1 gang for 2 Arteor modules Nominal plate dimensions: 89 x 89 mm ● Silver ● Nickel
1	7 312 92	
1	7 310 93	2 gang for 3 Arteor modules Nominal plate dimensions: 89 x 149 mm ● Silver ● Nickel
1	7 312 93	
1	7 310 94	2 gang for 4 Arteor modules Nominal plate dimensions: 89 x 149 mm ● Silver ● Nickel
1	7 312 94	

Synergy™ single pole switches - Traditional



7 330 00



7 334 02



7 334 07



7 331 56



7 333 57



7 334 09

Slim front plates:

BSS: Electro plated brushed stainless steel with clear epoxy lacquer coating

PSS: Electro plated stainless steel with trivalent chrome for mirror finish

SB: Electro plated stainless steel with electrophoretic satin brass lacquer

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximised wiring space

Pack	Cat.Nos	Single pole plate switches 10 AX - 250 V \sim
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep
		1 gang - 1-way switch Nominal plate dimensions: 86 x 86 mm
1	7 330 00	● Brushed stainless steel
1	7 332 00	● Polished stainless steel
1	7 334 00	● Satin brass
		1 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm
1	7 330 01	● Brushed stainless steel
1	7 332 01	● Polished stainless steel
1	7 334 01	● Satin brass
		1 gang - intermediate switch Nominal plate dimensions: 86 x 86 mm
1	7 330 05	● Brushed stainless steel
1	7 332 05	● Polished stainless steel
1	7 334 05	● Satin brass
		2 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm
1	7 330 02	● Brushed stainless steel
1	7 332 02	● Polished stainless steel
1	7 334 02	● Satin brass
		3 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm
1	7 330 03	● Brushed stainless steel
1	7 332 03	● Polished stainless steel
1	7 334 03	● Satin brass
		4 gang - 2-way switch Nominal plate dimensions: 86 x 146 mm
1	7 330 04	● Brushed stainless steel
1	7 332 04	● Polished stainless steel
1	7 334 04	● Satin brass

Pack	Cat.Nos	Single pole plate switches 20 AX - 250 V \sim
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep
		1 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm
1	7 331 31	● Brushed stainless steel
1	7 333 31	● Polished stainless steel
1	7 335 31	● Satin brass
		2 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm
1	7 331 32	● Brushed stainless steel
1	7 333 32	● Polished stainless steel
1	7 335 32	● Satin brass
		3 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm
1	7 331 33	● Brushed stainless steel
		Push on/off rotary dimmers 400 W 100-240 V\sim - 50/60 Hz
		Conform to BS EN 60669-1-2 For flush-mounting, back box to be min. 25 mm deep
		1 gang - 2 way Nominal plate dimensions: 86 x 86 mm
1	7 331 56	● Brushed stainless steel
1	7 333 56	● Polished stainless steel
1	7 335 56	● Satin brass
		2 gang - 2 way Nominal plate dimensions: 86 x 86 mm
1	7 331 57	● Brushed stainless steel
1	7 333 57	● Polished stainless steel
1	7 335 57	● Satin brass

Pack	Cat.Nos	Single pole push switches 10 A - 250 V \sim
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 16 mm deep
		1 gang - 2-way push switch Nominal plate dimensions: 86 x 86 mm
1	7 330 07	● Brushed stainless steel
1	7 332 07	● Polished stainless steel
1	7 334 07	● Satin brass

Pack	Cat.Nos	Isolator switches 10 A - 250 V \sim
		Conform to BS EN 60947-3: 1992 Switch locking feature For flush-mounting, back box to be min. 16 mm deep
		3 pole isolator switch Nominal plate dimensions: 86 x 86 mm
1	7 330 09	● Brushed stainless steel
1	7 332 09	● Polished stainless steel
1	7 334 09	● Satin brass

Synergy™ double pole switches - Traditional



7 332 10



7 334 10



7 330 12



7 330 23

Slim front plates:

BSS: Electro plated brushed stainless steel with clear epoxy satin lacquer coating

PSS: Electro plated stainless steel with trivalent chrome for mirror finish

SB: Electro plated stainless steel with electrophoretic satin brass lacquer

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximised wiring space






Pack	Cat.Nos	Double pole switches 20 A - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 25 mm deep Use cord outlet accessory Cat.No 7 300 53 (p. 563) for external cord outlet
		Double pole switch Nominal plate dimensions: 86 x 86 mm
1	7 330 10	Brushed stainless steel
1	7 332 10	Polished stainless steel
1	7 334 10	Satin brass
		DP switch + cord outlet + red LED power indicator LED invisible until activated Nominal plate dimensions: 86 x 86 mm
1	7 330 16	Brushed stainless steel
1	7 332 16	Polished stainless steel
1	7 334 16	Satin brass
		DP switch + red LED power indicator LED invisible until activated Nominal plate dimensions: 86 x 86 mm
1	7 330 12	Brushed stainless steel
1	7 332 12	Polished stainless steel
1	7 334 12	Satin brass





Pack	Cat.Nos	Double pole switches 45 A - 250 V~
		Conform to BS EN 60669-1 For flush-mounting, back box to be min. 45 mm deep
		1 gang switch Nominal plate dimensions: 86 x 86 mm
1	7 330 22	Brushed stainless steel
1	7 332 22	Polished stainless steel
		1 gang switch + red LED power indicator LED invisible until activated Nominal plate dimensions: 86 x 86 mm
1	7 330 23	Brushed stainless steel
1	7 332 23	Polished stainless steel
1	7 334 23	Satin brass
		1 gang switch + red LED power indicator large plate LED invisible until activated Nominal plate dimensions: 146 x 86 mm
1	7 330 21	Brushed stainless steel
1	7 332 21	Polished stainless steel
1	7 334 21	Satin brass

Synergy™ telephone, data sockets and television sockets - Traditional



Slim front plates:
 BSS: Electro plated brushed stainless steel with clear epoxy satin lacquer coating
 PSS: Electro plated stainless steel with trivalent chrome for mirror finish
 SB: Electro plated stainless steel with electrophoretic satin brass lacquer
 Terminal screws captive and backed off ready for cabling - large angled terminal entries
 Compact mechanism for maximised wiring space







Pack	Cat.Nos	Telephone sockets
		For flush-mounting, back box to be min. 35 mm deep
		UK master
		Nominal plate dimensions: 86 x 86 mm
1	7 330 50	 ● Brushed stainless steel
1	7 332 50	● Polished stainless steel
1	7 334 50	● Satin brass
		UK secondary
		Nominal plate dimensions: 86 x 86 mm
1	7 330 51	 ● Brushed stainless steel
1	7 332 51	● Polished stainless steel
1	7 334 51	● Satin brass
		RJ 11/RJ 12 - single
		Nominal plate dimensions: 86 x 86 mm
1	7 330 54	 ● Brushed stainless steel
1	7 332 54	● Polished stainless steel
1	7 334 54	● Satin brass
		Data sockets Cat. 6
		Rapid cable connection
		For flush-mounting, back box to be min. 35 mm deep
		RJ 45 - single
		Nominal plate dimensions: 86 x 86 mm
1	7 330 56	 ● Brushed stainless steel
1	7 332 56	● Polished stainless steel
1	7 334 56	● Satin brass
		RJ 45 - twin
		Nominal plate dimensions: 86 x 86 mm
1	7 330 57	 ● Brushed stainless steel
1	7 332 57	● Polished stainless steel
1	7 334 57	● Satin brass
















Pack	Cat.Nos	Television sockets
		For flush-mounting, back box to be min. 35 mm deep
		Screened
		TV socket - single male
		Nominal plate dimensions: 86 x 86 mm
1	7 330 40	 ● Brushed stainless steel
1	7 332 40	● Polished stainless steel
1	7 334 40	● Satin brass
		SAT socket - single "F" type
		Nominal plate dimensions: 86 x 86 mm
1	7 330 41	 ● Brushed stainless steel
1	7 332 41	● Polished stainless steel
1	7 334 41	● Satin brass
		TV-R socket
		Nominal plate dimensions: 86 x 86 mm
1	7 330 42	 ● Brushed stainless steel
1	7 332 42	● Polished stainless steel
		TV-R-SAT socket - "F" type
		Nominal plate dimensions: 86 x 86 mm
1	7 330 43	 ● Brushed stainless steel
1	7 332 43	● Polished stainless steel
1	7 334 43	● Satin brass





Synergy™ British standard socket outlets - Traditional















Slim front plates:
 BSS: Electro plated brushed stainless steel with clear epoxy satin lacquer coating
 PSS: Electro plated stainless steel with trivalent chrome for mirror finish
 SB: Electro plated stainless steel with electrophoretic satin brass lacquer
 Terminal screws captive and backed off ready for cabling - large angled terminal entries
 Compact mechanism for maximised wiring space




Pack	Cat.Nos	Socket outlets 13 A - 250 V~
		Conform to BS 1363: Part. 2 Patented 3 pin safety shutters mechanism 2 earth terminals For flush-mounting, back box to be min. 25 mm deep
		1 gang unswitched Nominal plate dimensions: 86 x 86 mm
1	7 330 65	 ● Brushed stainless steel
1	7 332 65	 ● Polished stainless steel
1	7 334 65	 ● Satin brass
		2 gang unswitched Nominal plate dimensions: 86 x 146 mm
1	7 330 75	 ● Brushed stainless steel
1	7 332 75	 ● Polished stainless steel
1	7 334 75	 ● Satin brass

Pack	Cat.Nos	Double pole socket outlets 13 A - 250 V~
		Conform to BS 1363: Part. 2 Patented 3 pin safety shutters mechanism, 2 earth terminals For flush-mounting, back box to be min. 25 mm deep
		1 gang switched Nominal plate dimensions: 86 x 86 mm
1	7 330 60	 ● Brushed stainless steel
1	7 332 60	 ● Polished stainless steel
1	7 334 60	 ● Satin brass
		1 gang switched with red LED power indicator LED invisible until activated Nominal plate dimensions: 86 x 86 mm
1	7 330 61	 ● Brushed stainless steel
1	7 332 61	 ● Polished stainless steel
1	7 334 61	 ● Satin brass
		2 gang switched Nominal plate dimensions: 86 x 146 mm
1	7 330 70	 ● Brushed stainless steel
1	7 332 70	 ● Polished stainless steel
1	7 334 70	 ● Satin Abrass
		2 gang switched with red LED power indicator LED invisible until activated Nominal plate dimensions: 86 x 146 mm
1	7 330 71	 ● Brushed stainless steel
1	7 332 71	 ● Polished stainless steel
1	7 334 71	 ● Satin brass
		2 gang switched outboard for standard and clean earth applications Nominal plate dimensions: 86 x 146 mm
1	7 330 74	 ● Brushed stainless steel
1	7 332 74	 ● Polished stainless steel
1	7 334 74	 ● Satin brass

Pack	Cat.Nos	Socket outlets 15 A - 250 V~
		Conform to BS 546 Patented 3 pin safety shutters mechanism, For flush-mounting, back box to be min. 35 mm deep
		1 gang unswitched Nominal plate dimensions: 86 x 86 mm
1	7 330 88 ¹	 ● Brushed stainless steel
		1 gang switched - single pole Nominal plate dimensions: 86 x 86 mm
1	7 330 89 ¹	 ● Brushed stainless steel
1	7 332 89 ¹	 ● Polished stainless steel
1	7 334 89 ¹	 ● Satin brass

Pack	Cat.Nos	Socket outlets 15 A - 250 V~ - SASO
		Conform to SASO Lic. 203182 For flush-mounting, back box to be min. 35 mm deep
		1 gang Nominal plate dimensions: 86 x 86 mm
1	7 330 85	 ● Brushed stainless steel
1	7 332 85	 ● Polished stainless steel
1	7 334 85	 ● Satin brass
		2 gang Nominal plate dimensions: 86 x 146 mm
1	7 330 86	 ● Brushed stainless steel
1	7 332 86	 ● Polished stainless steel
1	7 334 86	 ● Satin brass

Pack	Cat.Nos	Socket outlets 5 A - 250 V~
		Conform to BS 546 Patented 3 pin safety shutters mechanism, For flush-mounting, back box to be min. 25 mm deep
		1 gang unswitched Nominal plate dimensions: 86 x 86 mm
1	7 330 68 ¹	 ● Brushed stainless steel
1	7 332 68 ¹	 ● Polished stainless steel
1	7 334 68 ¹	 ● Satin brass
		1 gang switched - single pole Nominal plate dimensions: 86 x 146 mm
1	7 330 69 ¹	 ● Brushed stainless steel
1	7 332 69 ¹	 ● Polished stainless steel
1	7 334 69 ¹	 ● Satin brass

Pack	Cat.Nos	Socket outlets 2 A - 250 V~ - SASO
		Conform to BS 546 For flush-mounting, back box to be min. 25 mm deep
		1 gang unswitched Nominal plate dimensions: 86 x 86 mm
1	7 330 59 ¹	 ● Brushed stainless steel
1	7 332 59 ¹	 ● Polished stainless steel
1	7 334 59 ¹	 ● Satin brass

1 : Non-SASO products

Synergy™ fused connection units, RCD sockets and cooker control units - Traditional



7 330 32



7 334 37



7 332 97



7 332 29

Slim front plates:








BSS: Electro plated brushed stainless steel with clear epoxy satin lacquer coating




PSS: Electro plated stainless steel with trivalent chrome for mirror finish

SB: Electro plated stainless steel with electrophoretic satin brass lacquer

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximised wiring space

Pack	Cat.Nos	Fused connection units 13 A - 250 V~
		Conform to BS 1363: Part. 4 Front cable outlet with cord grip Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 25 mm deep
		Unswitched with cord outlet Nominal plate dimensions: 86 x 86 mm
1	7 330 32	 ● Brushed stainless steel
1	7 332 32	● Polished stainless steel
1	7 334 32	● Satin brass
		Unswitched without cord outlet Nominal plate dimensions: 86 x 86 mm
1	7 330 30	 ● Brushed stainless steel
1	7 332 30	● Polished stainless steel
1	7 334 30	● Satin brass
		Unswitched with red LED power indicator Nominal plate dimensions: 86 x 86 mm
1	7 330 31	 ● Brushed stainless steel
1	7 332 31	● Polished stainless steel
1	7 334 31	● Satin brass
		Unswitched with red LED power indicator + cord outlet Nominal plate dimensions: 86 x 86 mm
1	7 330 33	 ● Brushed stainless steel
1	7 332 33	● Polished stainless steel
1	7 334 33	● Satin brass
		DP switched without cord outlet Nominal plate dimensions: 86 x 146 mm
1	7 330 34	 ● Brushed stainless steel
1	7 332 34	● Polished stainless steel
1	7 334 34	● Satin brass
		DP switched with red LED power indicator Nominal plate dimensions: 86 x 146 mm
1	7 330 35	 ● Brushed stainless steel
1	7 332 35	● Polished stainless steel
1	7 334 35	● Satin brass
		DP switched with red LED power indicator + cord outlet Nominal plate dimensions: 86 x 146 mm
1	7 330 37	 ● Brushed stainless steel
1	7 332 37	● Polished stainless steel
1	7 334 37	● Satin brass

Pack	Cat.Nos	RCD sockets 13 A - 250 V~
		Conform to BS 7288 and BS 1363: Part. 2 Maximum operating current 16 A Incorporates a «test and reset» button For flush-mounting, back box to be min. 25 mm deep
		2 gang - DP 30 mA Active: Electrical latching trips on power failure Nominal plate dimensions: 86 x 146 mm
1	7 330 97	 ● Brushed stainless steel
1	7 332 97	● Polished stainless steel
1	7 334 97	● Satin brass
		2 gang - DP 30 mA Passive: Mechanical latching does not trip on power failure Nominal plate dimensions: 86 x 146 mm
1	7 330 98	 ● Brushed stainless steel
1	7 332 98	● Polished stainless steel
1	7 334 98	● Satin brass
		Cooker control units - 250 V~ Conform to BS 4177: 1992 For flush-mounting, back box to be min. 47 mm deep
		45 A DP switch + 13 A DP switched socket outlet with red LED power indicator Nominal plate dimensions: 86 x 146 mm
1	7 330 29	 ● Brushed stainless steel
1	7 332 29	● Polished stainless steel
1	7 334 29	● Satin brass

Synergy™ shaver sockets, cable outlets, blanking plates, cord outlets and front plates for Arteor mechanisms - Traditional



7 332 90



7 330 19



7 334 95



7 332 96



7 332 52

Slim front plates:

BSS: Electro plated brushed stainless steel with clear epoxy satin lacquer coating



PSS: Electro plated stainless steel with trivalent chrome for mirror finish



SB: Electro plated stainless steel with electrophoretic satin brass lacquer

Terminal screws captive and backed off ready for cabling - large angled terminal entries





Compact mechanism for maximised wiring space

Pack	Cat.Nos	Shaver sockets
		Conform to BS EN 61558-2-5 Suitable for use with European, British and Australian 2 pin plugs Rating: 20 VA IP 24 Screwless live and neutral terminals For flush-mounting, back box to be min. 45 mm deep
		240/120 V~ - 50/60 Hz Nominal plate dimensions: 146 x 86 mm
1	7 330 90	 ● Brushed stainless steel
1	7 332 90	● Polished stainless steel
1	7 334 90	● Satin brass

Pack	Cat.Nos	Cable outlets
		Conform to BS 5733 Fitted clamp and outlet membrane With terminal block
		20 A - 250 V~ Nominal plate dimensions: 86 x 86 mm
1	7 330 19	 ● Brushed stainless steel
1	7 332 19	● Polished stainless steel
1	7 334 19	● Satin brass
		45 A - 250 V~ Nominal plate dimensions: 86 x 86 mm
1	7 330 26	 ● Brushed stainless steel
1	7 332 26	● Polished stainless steel
1	7 334 26	● Satin brass

Pack	Cat.Nos	Blanking plates
		1 gang Nominal plate dimensions: 86 x 86 mm
1	7 330 95	 ● Brushed stainless steel
1	7 332 95	● Polished stainless steel
1	7 334 95	● Satin brass
		2 gang Nominal plate dimensions: 86 x 146 mm
1	7 330 96	 ● Brushed stainless steel
1	7 332 96	● Polished stainless steel
1	7 334 96	● Satin brass

Pack	Cat.Nos	Cord outlets
		1 gang Nominal plate dimensions: 86 x 86 mm
1	7 330 52	 ● Brushed stainless steel
1	7 332 52	● Polished stainless steel
1	7 334 52	● Satin brass

Pack	Cat.Nos	Front plates for Arteor mechanisms
		Clip-in carrier plates - No yoke required
		1 gang for 1 Arteor module Nominal plate dimensions: 86 x 86 mm
1	7 330 91	 ● Brushed stainless steel
1	7 332 91	● Polished stainless steel
1	7 334 91	● Satin brass
		1 gang for 2 Arteor modules Nominal plate dimensions: 86 x 86 mm
1	7 330 92	 ● Brushed stainless steel
1	7 332 92	● Polished stainless steel
1	7 334 92	● Satin brass
		2 gang for 3 Arteor modules Nominal plate dimensions: 86 x 146 mm
1	7 330 93	 ● Brushed stainless steel
1	7 332 93	● Polished stainless steel
1	7 334 93	● Satin brass
		2 gang for 4 Arteor modules Nominal plate dimensions: 86 x 146 mm
1	7 330 94	 ● Brushed stainless steel
1	7 332 94	● Polished stainless steel
1	7 334 94	● Satin brass

Synergy™ Flat plate

In today's world of shrinking proportions, the key trend is towards slenderness and simplicity of design. With a true flat plate design, the latest addition to the Synergy family is simply stunning...Whichever way you look at it

FROM A SINGLE SWITCH TO MULTI-FUNCTION MODULAR SOLUTIONS

Elegant profile

- A true flat plate design.
- High quality components and advanced manufacturing techniques
- Available in grid modules version for more complex installations



▶▶▶ Antique brass



▶▶▶ Brushed stainless steel



▶▶▶ Grid modules, p. 44

+ MORE INFORMATION

Get detailed information on many digital or printed supports or contact your Area Commercial Manager



▶ E-catalogue



▶ www.legrand.com

Synergy™ single pole switches and dimmers - Flat plate



7 343 31



7 343 32



7 342 47

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with transparent protection cover and 4 fixing screws (2 long and 2 short screws)

Synergy™ double pole switches - Flat plate



7 346 12



7 342 23

Terminal screws captive and backed off ready for cabling - large angled terminal entries
Compact mechanism for maximised wiring space
Supplied with transparent protection cover and 4 fixing screws (2 long and 2 short screws)

Pack	Cat.Nos	Single pole plate switches 20 AX - 250 V~
1	7 343 31	<p>Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep</p> <p>1 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 347 31	
1	7 343 32	<p>2 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 347 32	
1	7 343 33	<p>3 gang - 2-way switch Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 347 33	
1	7 343 34	<p>4 gang - 2-way switch Nominal plate dimensions: 86 x 146 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 347 34	

Pack	Cat.Nos	Single pole push switches 10 A - 250 V~
1	7 342 07	<p>Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep</p> <p>1 gang - 2-way push switch Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 346 07	

Pack	Cat.Nos	Push on/off rotary dimmers 400 W 250 V~ - 50/60 Hz
1	7 342 46	<p>Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep</p> <p>1 gang - 2 way Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 346 46	
1	7 342 47	<p>2 gang - 2 way Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 346 47	


Pack	Cat.Nos	Double pole switches 20 A - 250 V~
1	7 342 10	<p>Conform to BS EN 60669-1 For flush-mounting, back box to be min. 35 mm deep Supplied with 1 gang frame (3 mm thick) Cat.No 7341 98 in case of extra wiring space needed</p> <p>DP switch Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 346 10	
1	7 346 14	<p>DP switch + cord outlet Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Brushed stainless steel
1	7 342 16	<p>DP switch + cord outlet + red LED power indicator Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass
1	7 342 12	<p>DP switch + red LED power indicator Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 346 12	

Pack	Cat.Nos	Double pole switches 45 A - 250 V~
1	7 342 23	<p>Conform to BS EN 60669-1 For flush-mounting, back box to be min. 47 mm deep Red rocker</p> <p>DP switch + red LED power indicator Nominal plate dimensions: 86 x 86 mm</p> <ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1	7 346 23	

Synergy™ telephone, data sockets and television sockets - Flat plate



7 342 54



7 346 57















7 346 40







7 342 43

Terminal screws captive and backed off ready for cabling - large angled terminal entries
 Compact mechanism for maximised wiring space
 Supplied with transparent protection cover and 4 fixing screws (2 long and 2 short screws)

Pack	Cat.Nos	Telephone sockets
		For flush-mounting, back box to be min. 35 mm deep White rocker
		UK master Nominal plate dimensions: 86 x 86 mm
1	7 342 50	 ● Antique Brass
1	7 346 50	 ● Brushed stainless steel
		UK secondary Nominal plate dimensions: 86 x 86 mm
1	7 342 51	 ● Antique Brass
1	7 346 51	 ● Brushed stainless steel
		RJ 11 / RJ 12 - single Nominal plate dimensions: 86 x 86 mm
1	7 342 54	 ● Antique Brass
1	7 346 54	 ● Brushed stainless steel

Pack	Cat.Nos	Television sockets
		For flush-mounting, back box to be min. 35 mm deep Screened
		TV sockets - single male Nominal plate dimensions: 86 x 86 mm
1	7 342 40	 ● Antique Brass
1	7 346 40	 ● Brushed stainless steel
		SAT sockets - single "F" type Nominal plate dimensions: 86 x 86 mm
1	7 342 41	 ● Antique Brass
1	7 346 41	 ● Brushed stainless steel
		TV-R-SAT sockets - "F" type Nominal plate dimensions: 86 x 86 mm
1	7 342 43	 ● Antique Brass
1	7 346 43	 ● Brushed stainless steel

Pack	Cat.Nos	Data sockets Cat. 6
		Rapid cable connection For flush-mounting, back box to be min. 35 mm deep
		RJ 45 - single Nominal plate dimensions: 86 x 86 mm
1	7 342 56	 ● Antique Brass
1	7 346 56	 ● Brushed stainless steel
		RJ 45 - twin Nominal plate dimensions: 86 x 86 mm
1	7 342 57	 ● Antique Brass
1	7 346 57	 ● Brushed stainless steel

Synergy™ British standard socket outlets - Flat plate



7 346 75



7 342 61



7 346 89



7 342 59

Terminal screws captive and backed off ready for cabling - large angled terminal entries
 Compact mechanism for maximised wiring space
 Supplied with transparent protection cover and 4 fixing screws (2 long and 2 short screws)

Pack	Cat.Nos	Socket outlets 13 A - 250 V~
1	7 342 65	Conform to BS EN 1363: Part. 2 Patented 3 pin safety shutters mechanism 2 earth terminals For flush-mounting, back box to be min. 35 mm deep 1 gang unswitched Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 65	
1	7 342 75	2 gang unswitched Nominal plate dimensions: 86 x 146 mm ● Antique Brass ● Brushed stainless steel
1	7 346 75	

Pack	Cat.Nos	Double pole socket outlets 13 A - 250 V~
1	7 342 60	Conform to BS EN 1363: Part. 2 Patented 3 pin safety shutters mechanism 2 earth terminals For flush-mounting, back box to be min. 35 mm deep 1 gang switched Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 60	
1	7 342 61	1 gang switched with red LED power indicator Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 61	
1	7 342 70	2 gang switched Nominal plate dimensions: 86 x 146 mm ● Antique Brass ● Brushed stainless steel
1	7 346 70	
1	7 342 71	2 gang switched with red LED power indicator Nominal plate dimensions: 86 x 146 mm ● Antique Brass ● Brushed stainless steel
1	7 346 71	

Pack	Cat.Nos	Socket outlets 15 A - 250 V~
1	7 342 89 ¹	Conform to BS 546 Patented 3 pin safety shutters mechanism For flush-mounting, back box to be min. 35 mm deep 1 gang switched Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 89 ¹	
1	7 342 69 ¹	Socket outlets 5 A - 250 V~ Conform to BS 546 Patented 3 pin safety shutters mechanism For flush-mounting, back box to be min. 25 mm deep 1 gang switched Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 69 ¹	

Pack	Cat.Nos	Socket outlets 2 A - 250 V~
1	7 342 59 ¹	Conform to BS 546 For flush-mounting, back box to be min. 25 mm deep 1 gang unswitched Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 59 ¹	

1 : Non-SASO products

Synergy™ fused connection units, shaver sockets, cooker control units, cable outlets and blanking plates - Flat plate



Terminal screws captive and backed off ready for cabling - large angled terminal entries
 Compact mechanism for maximised wiring space
 Supplied with transparent protection cover and 4 fixing screws (2 long and 2 short screws)

Pack	Cat.Nos	Fused connection units unswitched 13 A - 250 V~
1	7 342 32	Conform to BS 1363: Part. 4 Front cable outlet with cord grip Fuses supplied Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 35 mm deep Supplied with 2 gang frame Cat.No 7 341 99 (3 mm thick) in case of extra wiring space needed Unswitched - with cord outlet Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 32	

Pack	Cat.Nos	Fused connection units switched 13 A - 250 V~
1	7 342 34	Conform to BS 1363: Part. 4 Front cable outlet with cord grip Fuses supplied Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 35 mm deep Supplied with 2 gang frame Cat.No 7 341 99 (3 mm thick) in case of extra wiring space needed DP switched - without cord outlet Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 34	
1	7 342 37	Conform to BS 1363: Part. 4 Front cable outlet with cord grip Fuses supplied Locked captive fuse carrier (padlockable) For flush-mounting, back box to be min. 35 mm deep Supplied with 2 gang frame Cat.No 7 341 99 (3 mm thick) in case of extra wiring space needed DP switched - with red LED power indicator + cord outlet Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 37	

Pack	Cat.Nos	Shaver sockets
1	7 342 90	Conform to BS EN 61558-2-5 suitable for use with European, British, American and Australian 2 pin plugs Rating: 20 VA IP 24 Screwless live and neutral terminals For flush-mounting, back box to be min. 45 mm deep Supplied with 2 gang frame Cat.No 7 341 99 (3 mm thick) in case of extra wiring space needed 240 V / 120 V - 50/60 Hz Nominal plate dimensions: 146 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 90	

Pack	Cat.Nos	Cooker control units - 250 V~
1	7 342 29	Conform to BS 4177: 1992 For flush-mounting, back box to be min 47 mm deep 45 A DP switch + 13 A DP switched socket outlet Nominal plate dimensions: 86 x 146 mm ● Antique Brass ● Brushed stainless steel
1	7 346 29	


Pack	Cat.Nos	Cable outlets
1	7 342 19	Conform to BS 5733 Fitted with clamp and outlet membrane With terminal block 20 A - 250 V~ Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 19	
1	7 342 26	Conform to BS 5733 Fitted with clamp and outlet membrane With terminal block 45 A - 250 V~ Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 26	

Pack	Cat.Nos	Blanking plates
1	7 342 95	1 gang Nominal plate dimensions: 86 x 86 mm ● Antique Brass ● Brushed stainless steel
1	7 346 95	
1	7 342 96	2 gang Nominal plate dimensions: 86 x 146 mm ● Antique Brass ● Brushed stainless steel
1	7 346 96	

Synergy™ cord outlets, accessories and front plates for Arteor mechanism - Flat plate








7 346 52



7 342 94

Terminal screws captive and backed off ready for cabling - large angled terminal entries. Compact mechanism for maximised wiring space. Supplied with transparent protection cover and 4 fixing screws (2 long and 2 short screws)

Pack	Cat.Nos	Cord outlets	
1	7 342 52	1 gang	Nominal plate dimensions: 86 x 86 mm
1	7 346 52		<ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
Accessories			
Side extension frames			
10	7 341 98		3 mm thick frames to be used when extra wiring space is needed
10	7 341 99		1 gang frame
			2 gang frame
Screw extension kit			
1	7 341 90		To be used when the installation depth of the flushmounting box is too big (i.e. walls with marble or ceramic finish)
			Kit comprising:
			- 20 pre-assembled rods-short
			- 2 threaded rods
Front plates for Arteor mechanisms			
Clip-in carrier plates - No yoke required			
1 gang for 1 Arteor module			
1	7 342 91		Nominal plate dimensions: 86 x 86 mm
1	7 346 91		<ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
1 gang for 2 Arteor modules			
1	7 342 92		Nominal plate dimensions: 86 x 86 mm
1	7 346 92		<ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
2 gang for 3 Arteor modules			
1	7 342 93		Nominal plate dimensions: 86 x 146 mm
1	7 346 93		<ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel
2 gang for 4 Arteor modules			
1	7 342 94		Nominal plate dimensions: 86 x 146 mm
1	7 346 94		<ul style="list-style-type: none"> ● Antique Brass ● Brushed stainless steel

Synergy™ Metalclad

A perfect flush fit with their surface mounting back boxes, the ideal solution for simple rugged performance

DESIGNED TO TAKE THE ROUGH WITH THE SMOOTH

- All fonctions are available from switches to socket outlets or data sockets
- Available in grid modules for more complex installations



▶▶▶ Metalclad, p. 42



▶▶▶ Grid system p. 44

+ MORE INFORMATION



▶ www.legrand.com

Synergy™ switches, television, telephone, data sockets, blanking plates, cable outlets and front plates for Arteor mechanisms - Metalclad



Front plates: grey epoxy coated steel
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Supplied complete with close fit 43 mm deep surface-mounting back box

Pack	Cat.Nos	Single pole plate switches 10 AX - 250 V~
5	7 338 00	1 gang - 1-way
5	7 338 01	1 gang - 2-way
5	7 338 05	1 gang - intermediate
5	7 338 02	2 gang - 2-way
5	7 338 03	3 gang - 2-way

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
5	7 338 10	DP switch
5	7 338 16	DP switch with cord outlet + red LED power indicator
5	7 338 12	DP switch + red LED power indicator

Pack	Cat.Nos	Double pole switch 45 A - 250 V~
5	7 338 21	Red rocker DP switch + red power indicator

Pack	Cat.Nos	Television sockets
5	7 338 40	Screened TV - single, male
1	7 338 41	Screened satellite - single, "F" type

Pack	Cat.Nos	Telephone sockets
5	7 338 50	Single master
5	7 338 51	Single secondary

Pack	Cat.Nos	Data sockets Cat. 6
1	7 338 56	RJ 45 - single
1	7 338 57	RJ 45 - twin

Pack	Cat.Nos	Blanking plates
5	7 338 95	1 gang Nominal plate dimensions: 86 x 86 mm
5	7 338 96	2 gang Nominal plate dimensions: 86 x 146 mm

Pack	Cat.Nos	Cable outlet 20 A - 250 V~
5	7 338 19	20 A - with terminal block and outlet gland

Pack	Cat.Nos	Front plates for Arteor mechanisms
5	7 338 91	Clip-in carrier plates - No yoke required Supplied with back box 1 gang for 1 Arteor module Nominal plate dimensions: 86 x 86 mm
5	7 338 92	1 gang for 2 Arteor modules Nominal plate dimensions: 86 x 86 mm
5	7 338 93	2 gang for 3 Arteor modules Nominal plate dimensions: 86 x 146 mm
5	7 338 94	2 gang for 4 Arteor modules Nominal plate dimensions: 86 x 146 mm

Synergy™ British standard socket outlets, RCD sockets and fused connection units - Metalclad



7 338 65



















7 338 71

7 338 89

7 338 34

7 338 37

Front plates: grey epoxy coated steel
Terminal screws captive and backed off ready for cabling - large angled terminal entries
Supplied complete with close fit 43 mm deep surface-mounting back box


Pack	Cat.Nos	Socket outlets 13 A - 250 V~	Pack	Cat.Nos	RCD sockets 13 A - 250 V~
5	7 338 65	Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutters mechanism 2 earth terminals Flush-mounting back box: min. 25 mm deep 1 gang - unswitched Nominal plate dimensions: 86 x 86 mm 	1	7 338 97	Conform to BS 7288: 1990 and BS 1363 - Part 2: 1995 Maximum operating current 16 A Incorporate a "test and reset" button Flush-mounting back box: min. 25 mm deep RCD unit 2 gang DP 30 mA Nominal plate dimensions: 86 x 146 mm Double pole switched Active Electrical latching - trips on power failure 
5	7 338 75	2 gang - unswitched Nominal plate dimensions: 86 x 146 mm 	1	7 338 98	Passive Mechanical latching - does NOT trip on power failure 
5	7 338 60	Double pole socket outlets 13 A - 250 V~ Conform to BS 1363 - Part 2: 1995 Patented 3 pin safety shutters mechanism 2 earth terminals Flush-mounting back box: min. 25 mm deep Switched 1 gang Nominal plate dimensions: 86 x 86 mm 	5	7 338 34	Fused connection units 13 A - 250 V~ Conform to BS 1363 - Part 4: 1995 Fused 13 A (fuse supplied) Fuse drawer retained by quarter turn catch, drawer padlockable in open position for safety Flush-mounting back box: min. 25 mm deep Nominal plate dimensions: 86 x 86 mm Double pole switched Without cord outlet 
5	7 338 70	2 gang Nominal plate dimensions: 86 x 146 mm 	5	7 338 35	With red LED power indicator 
5	7 338 61	Switched with red LED power indicator 1 gang Nominal plate dimensions: 86 x 86 mm 	5	7 338 36	With cord outlet 
5	7 338 71	2 gang Nominal plate dimensions: 86 x 146 mm 	5	7 338 37	With cord outlet + red LED power indicator 
5	7 338 88 ¹	Socket outlets 15 A - 250 V~ Conform to BS 546: 1950 Patented 3 pin safety shutter mechanism Flush-mounting back box: min. 35 mm deep Nominal plate dimensions: 86 x 86 mm 1 gang - unswitched 	5	7 338 30	Unswitched Without cord outlet 
5	7 338 89 ¹	1 gang - switched 	5	7 338 31	With red LED power indicator 
			5	7 338 32	With cord outlet 
			5	7 338 33	With cord outlet + red LED power indicator 

1 : Non-SASO products

Synergy™ grid system for grid modules





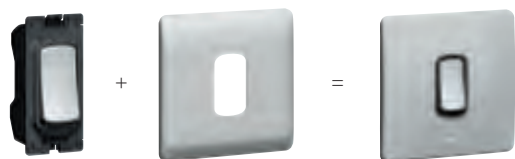









GRID MODULES	ARCHITRAVES		FRONT PLATES WITH SMALL APERTURES			
	1 gang	2 gang	1 gang		2 gang	
	1 module	2 modules	1 module	2 modules	3 modules	4 modules
Dimensions (mm)	86 x 36	146 x 36	86 x 86	86 x 86	86 x 146	86 x 146
White	7 301 80	7 301 81	7 301 91	7 301 92	7 301 93	7 301 94
Traditional Brushed stainless steel	7 331 80	7 331 81	7 331 91	7 331 92	7 331 93	7 331 94
Traditional Polished stainless steel	7 333 80	7 333 81	7 333 91	7 333 92	7 333 93	7 333 94
Traditional Satin brass	7 335 80	7 335 81	7 335 91	7 335 92	7 335 93	7 335 94
Flat plate Antique Brass	-	-	7 343 91 ⁽¹⁾	7 343 92 ⁽¹⁾	7 343 93 ⁽¹⁾	7 343 94 ⁽¹⁾
Flat plate Brushed Stainless Steel	-	-	7 347 91 ⁽¹⁾	7 347 92 ⁽¹⁾	7 347 93 ⁽¹⁾	7 347 94 ⁽¹⁾
Metalclad	-	-	7 339 91	7 339 92	7 339 93	7 339 94
Dimensions (mm)	-	-	89 x 89	89 x 89	89 x 149	89 x 149
Modern Silver	-	-	7 311 91	7 311 92	7 311 93	7 311 94
Modern Nickel	-	-	7 313 91	7 313 92	7 313 93	7 313 94
GRID YOKES						
For White, Traditional and Metalclad	1 x 7 354 95	1 x 7 354 96	1 x 7 354 90	1 x 7 354 91	1 x 7 354 92	1 x 7 354 92
For Modern	-	-	1 x 7 354 81	1 x 7 354 81	1 x 7 354 82	1 x 7 354 82
BOXES						
Flush-mounting						
Flush-mounting with phase barriers						
Surface-mounting, steel with knockouts						
Surface-mounting, steel without knockouts						
Surface-mounting, metal with knockouts	-	-	7 364 00	7 364 00	7 364 01	7 364 01

Example of association:



1: Yokes supplied with front plate

FRONT PLATES WITH SMALL APERTURES

2 x 2 gang		3 x 2 gang		3 x 3 gang	4 x 3 gang
6 modules	8 modules	9 modules	12 modules	18 modules	24 modules
					
146 x 146	146 x 146	207 x 146	207 x 146	267 x 206	267 x 206
7 301 82	7 301 83	7 301 84	7 301 85	7 301 86	7 301 87
7 331 82	7 331 83	7 331 84	7 331 85	7 331 86	7 331 87
7 333 82	7 333 83	7 333 84	7 333 85	7 333 86	7 333 87
7 335 82	7 335 83	7 335 84	7 335 85	7 335 86	7 335 87
7 343 82 ⁽¹⁾	7 343 83 ⁽¹⁾	-	-	-	-
7 347 82 ⁽¹⁾	7 347 83 ⁽¹⁾	-	-	-	-
7 339 82	7 339 83	7 339 84	7 339 85	7 339 86	7 339 87
					
146 x 146	146 x 146				
7 311 82	7 311 83	-	-	-	-
7 313 82	7 313 83	-	-	-	-
					
2 x 7 354 92	2 x 7 354 92	3 x 7 354 92	3 x 7 354 92	3 x 7 354 93	3 x 7 354 93
2 x 7 354 92	2 x 7 354 92	3 x 7 354 92	3 x 7 354 92	3 x 7 354 93	3 x 7 354 93
0 818 52	0 818 52	0 818 53	0 818 53	0 818 54	0 818 55
-	-	0 818 57	0 818 57	-	-
7 364 18	7 364 18	7 364 28	7 364 28	-	-
7 364 22	7 364 22	7 364 32	7 364 32	-	-

Synergy™ Grid system total flexibility and choice

A vast selection of function modules, matching contoured rockers and a selection of rocker markings

UNRIVALLED VERSATILITY WITHOUT COMPROMISING ON STYLE

- Grid plates are available in the complete range of Synergy finishes and in sizes from 1 to 24 gang
- Discreet, stylish accessories offering a level of technology to meet the needs of international travellers



▶▶▶ For grid modules p. 44



▶▶▶ For Arteor mechanisms please consult us

+ MORE INFORMATION



▶ www.legrand.com

Synergy™ Grid modules - decorative rockers



Front plate selection charts p. 44

Pack	Cat.Nos	Single pole switches 10 AX - 250 V~
		1-way switch
10	7 395 04	● Modern Silver
10	7 395 03	● Modern Nickel
1	7 398 24	● Flat plate Antique brass
1	7 398 64	● Flat plate Brushed Stainless Steel
		2-way switch
10	7 395 08	● Modern Silver
10	7 395 07	● Modern Nickel
1	7 398 28	● Flat plate Antique brass
1	7 398 68	● Flat plate Brushed Stainless Steel
		Intermediate switch
10	7 395 01	● Modern Silver
10	7 395 00	● Modern Nickel
1	7 398 21	● Flat plate Antique brass
1	7 398 61	● Flat plate Brushed Stainless Steel

Pack	Cat.Nos	Single pole switches 20 AX - 250 V~
		1-way switch
10	7 396 79	● Modern Silver
10	7 396 80	● Modern Nickel
1	7 398 39	● Flat plate Antique brass
1	7 398 79	● Flat plate Brushed Stainless Steel
		2-way switch
10	7 396 83	● Modern Silver
10	7 396 82	● Modern Nickel
1	7 398 33	● Flat plate Antique brass
1	7 398 73	● Flat plate Brushed Stainless Steel
		2-way retractive centre off switch
10	7 396 93	● Modern Silver
10	7 396 92	● Modern Nickel
1	7 398 23	● Flat plate Antique brass
1	7 398 63	● Flat plate Brushed Stainless Steel

Synergy™ Grid modules - white and anthracite rockers without marking



Front plate selection charts **p. 44**

Pack	Cat.Nos		Single pole switches 10 AX - 250 V \sim
	White	Anthracite	
10	7 354 00	7 355 00	Conform to BS EN 60669-1 1 way
10	7 354 01	7 355 01	1 way + neon
10	7 354 03	7 355 03	2 way
10	7 354 07	7 355 07	Intermediate
10	7 354 05	7 355 05	2-way push switch
10	7 354 06	7 355 06	2-way push switch marked "BELL"

Pack	Cat.Nos		Single pole switches 20 AX - 250 V \sim
	White	Anthracite	
10	7 354 10	7 355 10	Conform to BS EN 60669-1 1 way
10	7 354 11	7 355 11	1 way + neon
10	7 354 12	7 355 12	2 way
10	7 354 18	7 355 18	Intermediate
10	7 354 13	7 355 13	2-way centre off
10	7 354 14	7 355 14	2-way retractive centre off
10	7 354 15	7 355 15	2-way push switch

Pack	Cat.Nos		Single pole key switches 20 AX - 250 V \sim
	White	Anthracite	
10	7 354 16	7 355 16	Conform to BS EN 60669-1 Key supplied 2-way
10	7 354 17	7 355 17	2-way retractive centre off

Pack	Cat.Nos		Double pole switches 20 AX - 250 V \sim
	White	Anthracite	
10	7 354 20	7 355 20	Conform to BS EN 60669-1 Switch
10	7 354 21	7 355 21	Switch + neon
10	7 354 22	7 355 22	Push to make
10	7 354 25	7 355 25	Push to break

Pack	Cat.Nos		Double pole key switches 20 AX - 250 V \sim
	White	Anthracite	

Pack	Cat.Nos		Dimmers 100 - 240 V \sim - 50-60 Hz
	White	Anthracite	
1	7 354 46	7 355 46	Conform to BS EN 60669-2-1 Rotary dimming and push on/off 2-way - 300 W - push dimmer
1	7 354 48	7 355 48	2-way rotary dimmer - for 0-10 V ballasts - 400 W

Pack	Cat.Nos		Time delay switches
	White	Anthracite	
1	7 354 47	7 355 47	300 W

Pack	Cat.Nos		Telephone sockets
	White	Anthracite	
1 10	7 354 50	7 355 50	BT master
1	7 354 51	7 355 51	BT secondary

Pack	Cat.Nos		Data sockets - Cat. 6
	White	Anthracite	
10	7 352 56	7 353 56	RJ 45 - 8 contacts

Pack	Cat.Nos		Television sockets
	White	Anthracite	
10	7 354 40	7 355 40	Screened TV single, male
10	7 354 41	7 355 41	Screened TV-SAT

Pack	Cat.Nos		Loudspeaker sockets
	White	Anthracite	
10	7 352 65	7 353 65	Hi-Fi loudspeaker socket

Pack	Cat.Nos		Fuse carriers 13 A - 250 V \sim
	White	Anthracite	
10	7 350 30	7 351 30	Fuse carrier

Pack	Cat.Nos		Accessories
	White	Anthracite	
10	7 350 62	7 351 62	Indicator - green neon
10	7 350 60	7 351 60	Indicator - red neon
20	7 354 36	7 355 36	Blanking plate

catalogue number index

Cat. Nos	Page No	Pack	Cat. Nos	Page No	Pack	Cat. Nos	Page No	Pack	Cat. Nos	Page No	Pack	Cat. Nos	Page No	Pack	Cat. Nos	Page No	Pack
0 818 00			7 300 65	20	10	7 301 90	22	1	7 311 83	45	1	7 313 83	45	1	7 330 96	35	1
0 818 52	45	10	7 300 66	20	10	7 301 91	44	10	7 311 91	44	1	7 313 91	44	1	7 330 97	34	1
0 818 53	45	10	7 300 67	20	10	7 301 92	44	10	7 311 92	44	1	7 313 92	44	1	7 330 98	34	1
0 818 54	45	1	7 300 68	21	10	7 301 93	44	10	7 311 93	44	1	7 313 93	44	1	7 331 31	30	1
0 818 55	45	4	7 300 69	21	10	7 301 94	44	10	7 311 94	44	1	7 313 94	44	1	7 331 32	30	1
0 818 57	45	10	7 300 70	20	5	7 310 00	24	1	7 312 00	24	1	7 330 00	30	1	7 331 33	30	1
0 891 09	23	200	7 300 71	20	5	7 310 01	24	1	7 312 01	24	1	7 330 01	30	1	7 331 56	30	1
0 891 10	23	100	7 300 74	20	5	7 310 02	24	1	7 312 02	24	1	7 330 02	30	1	7 331 57	30	1
0 891 11	23	60	7 300 75	20	5	7 310 03	24	1	7 312 03	24	1	7 330 03	30	1	7 331 80	44	1
0 891 13	23	100	7 300 76	20	5	7 310 04	24	1	7 312 04	24	1	7 330 04	30	1	7 331 81	44	1
0 891 14	23	40	7 300 77	20	5	7 310 05	24	1	7 312 05	24	1	7 330 05	30	1	7 331 82	45	1
0 891 17	23	50	7 300 80	21	10	7 310 07	24	1	7 312 07	24	1	7 330 07	30	1	7 331 83	45	1
0 891 18	23	50	7 300 81	21	10	7 310 09	25	1	7 312 09	25	1	7 330 09	30	1	7 331 84	45	1
0 891 40	23	40	7 300 82	21	10	7 310 10	25	1	7 312 10	25	1	7 330 10	31	1	7 331 85	45	1
7 300 00			7 300 83	21	10	7 310 12	25	1	7 312 12	25	1	7 330 12	31	1	7 331 86	45	1
7 300 00	18	10	7 300 84	21	10	7 310 16	25	1	7 312 16	25	1	7 330 16	31	1	7 331 87	45	1
7 300 01	18	10	7 300 85	21	5	7 310 19	29	1	7 312 19	29	1	7 330 19	35	1	7 331 88	22	1
7 300 02	18	10	7 300 86	21	5	7 310 23	25	1	7 312 23	25	1	7 330 21	31	1	7 331 90	22	1
7 300 03	18	10	7 300 87	21	10	7 310 26	29	1	7 312 26	29	1	7 330 22	31	1	7 331 91	44	1
7 300 04	18	10	7 300 88	21	10	7 310 29	29	1	7 312 29	29	1	7 330 23	31	1	7 331 92	44	1
7 300 05	18	5	7 300 89	21	10	7 310 30	28	1	7 312 30	28	1	7 330 26	35	1	7 331 93	44	1
7 300 06	18	5	7 300 90	21	1	7 310 31	28	1	7 312 31	28	1	7 330 29	34	1	7 331 94	44	1
7 300 07	18	5	7 300 91	22	10	7 310 32	28	1	7 312 32	28	1	7 330 30	34	1	7 332 00	30	1
7 300 08	18	10	7 300 92	22	10	7 310 33	28	1	7 312 33	28	1	7 330 31	34	1	7 332 01	30	1
7 300 10	19	10	7 300 93	22	10	7 310 34	28	1	7 312 34	28	1	7 330 32	34	1	7 332 02	30	1
7 300 11	18	5	7 300 94	22	10	7 310 35	28	1	7 312 35	28	1	7 330 33	34	1	7 332 03	30	1
7 300 12	19	10	7 300 95	22	10	7 310 37	28	1	7 312 37	28	1	7 330 34	34	1	7 332 04	30	1
7 300 19	22	10	7 300 96	22	10	7 310 40	26	1	7 312 40	26	1	7 330 35	34	1	7 332 05	30	1
7 300 20	19	5	7 301 07	18	5	7 310 41	26	1	7 312 41	26	1	7 330 37	34	1	7 332 07	30	1
7 300 21	19	5	7 301 10	19	10	7 310 50	26	1	7 312 50	26	1	7 330 40	32	1	7 332 09	30	1
7 300 22	19	10	7 301 12	19	10	7 310 51	26	1	7 312 51	26	1	7 330 41	32	1	7 332 10	31	1
7 300 23	19	10	7 301 20	19	5	7 310 52	29	1	7 312 52	29	1	7 330 42	32	1	7 332 12	31	1
7 300 24	18	10	7 301 22	19	10	7 310 54	26	1	7 312 54	26	1	7 330 43	32	1	7 332 16	31	1
7 300 26	22	5	7 301 24	18	10	7 310 56	26	1	7 312 56	26	1	7 330 50	32	1	7 332 19	35	1
7 300 28	22	5	7 301 30	18	10	7 310 57	26	1	7 312 57	26	1	7 330 51	32	1	7 332 21	31	1
7 300 29	22	5	7 301 31	18	10	7 310 60	27	1	7 312 60	27	1	7 330 52	35	1	7 332 22	31	1
7 300 32	22	10	7 301 32	18	10	7 310 65	27	1	7 312 65	27	1	7 330 54	32	1	7 332 23	31	1
7 300 33	22	10	7 301 33	18	10	7 310 68	27	1	7 312 68	27	1	7 330 56	32	1	7 332 26	35	1
7 300 36	22	10	7 301 34	18	10	7 310 69	27	1	7 312 69	27	1	7 330 57	32	1	7 332 29	34	1
7 300 37	22	10	7 301 35	18	10	7 310 70	27	1	7 312 70	27	1	7 330 59	33	1	7 332 30	34	1
7 300 40	19	10	7 301 40	19	10	7 310 71	27	1	7 312 71	27	1	7 330 60	33	1	7 332 31	34	1
7 300 41	19	1	7 301 44	19	10	7 310 75	27	1	7 312 75	27	1	7 330 61	33	1	7 332 34	34	1
7 300 42	19	10	7 301 45	19	10	7 310 85	27	1	7 312 85	27	1	7 330 65	33	1	7 332 35	34	1
7 300 43	19	1	7 301 50	18	1	7 310 86	27	1	7 312 86	27	1	7 330 68	33	1	7 332 37	34	1
7 300 49	18	1	7 301 56	18	1	7 310 89	27	1	7 312 89	27	1	7 330 69	33	1	7 332 40	32	1
7 300 50	19	10	7 301 57	18	1	7 310 90	29	1	7 312 90	29	1	7 330 70	33	1	7 332 41	32	1
7 300 51	19	10	7 301 58	23	10	7 310 91	29	1	7 312 91	29	1	7 330 71	33	1	7 332 42	32	1
7 300 53	23	10	7 301 59	23	10	7 310 92	29	1	7 312 92	29	1	7 330 74	33	1	7 332 43	32	1
7 300 54	19	10	7 301 61	20	5	7 310 93	29	1	7 312 93	29	1	7 330 75	33	1	7 332 50	32	1
7 300 56	19	1	7 301 62	20	10	7 310 94	29	1	7 312 94	29	1	7 330 85	33	1	7 332 51	32	1
7 300 57	19	1	7 301 80	44	10	7 310 95	29	1	7 312 95	29	1	7 330 86	33	1	7 332 52	35	1
7 300 58	23	10	7 301 81	44	10	7 310 96	29	1	7 312 96	29	1	7 330 88	33	1	7 332 54	32	1
7 300 59	21	10	7 301 82	45	10	7 311 31	24	1	7 313 31	24	1	7 330 89	33	1	7 332 56	32	1
7 300 60	20	10	7 301 83	45	10	7 311 32	24	1	7 313 32	24	1	7 330 90	35	1	7 332 57	32	1
7 300 61	20	10	7 301 84	45	1	7 311 56	25	1	7 313 56	25	1	7 330 91	35	1	7 332 59	33	1
7 300 64	20	10	7 301 85	45	1	7 311 57	25	1	7 313 57	25	1	7 330 94	35	1	7 332 60	33	1
			7 301 87	45	1	7 311 82	45	1	7 313 82	45	1	7 330 95	35	1			
			7 301 88	22	10												

Cat. Nos	Page No	Pack
7 332 61	33	1
7 332 65	33	1
7 332 68	33	1
7 332 69	33	1
7 332 70	33	1
7 332 71	33	1
7 332 74	33	1
7 332 75	33	1
7 332 85	33	1
7 332 86	33	1
7 332 89	33	1
7 332 90	35	1
7 332 91	35	1
7 332 92	35	1
7 332 93	35	1
7 332 94	35	1
7 332 95	35	1
7 332 96	35	1
7 332 97	34	1
7 332 98	34	1
7 333 31	30	1
7 333 32	30	1
7 333 56	30	1
7 333 57	30	1
7 333 80	44	1
7 333 81	44	1
7 333 82	45	1
7 333 83	45	1
7 333 84	45	1
7 333 85	45	1
7 333 86	45	1
7 333 87	45	1
7 333 91	44	1
7 333 92	44	1
7 333 93	44	1
7 333 94	44	1
7 334 00	30	1
7 334 01	30	1
7 334 02	30	1
7 334 03	30	1
7 334 04	30	1
7 334 05	30	1
7 334 07	30	1
7 334 09	30	1
7 334 10	31	1
7 334 12	31	1
7 334 16	31	1
7 334 19	35	1
7 334 21	31	1
7 334 23	31	1
7 334 26	35	1
7 334 29	34	1
7 334 30	34	1
7 334 31	34	1
7 334 32	34	1
7 334 33	34	1
7 334 34	34	1
7 334 35	34	1
7 334 37	34	1
7 334 40	32	1
7 334 41	32	1
7 334 43	32	1
7 334 50	32	1

Cat. Nos	Page No	Pack
7 334 51	32	1
7 334 52	35	1
7 334 54	32	1
7 334 56	32	1
7 334 57	32	1
7 334 59	33	1
7 334 60	33	1
7 334 61	33	1
7 334 65	33	1
7 334 68	33	1
7 334 69	33	1
7 334 70	33	1
7 334 71	33	1
7 334 74	33	1
7 334 75	33	1
7 334 85	33	1
7 334 86	33	1
7 334 89	33	1
7 334 90	35	1
7 334 91	35	1
7 334 92	35	1
7 334 93	35	1
7 334 94	35	1
7 334 95	35	1
7 334 96	35	1
7 334 97	34	1
7 334 98	34	1
7 335 31	30	1
7 335 32	30	1
7 335 56	30	1
7 335 57	30	1
7 335 80	44	1
7 335 81	44	1
7 335 82	45	1
7 335 83	45	1
7 335 84	45	1
7 335 85	45	1
7 335 86	45	1
7 335 87	45	1
7 335 91	44	1
7 335 92	44	1
7 335 93	44	1
7 335 94	44	1
7 338 00	42	5
7 338 01	42	5
7 338 02	42	5
7 338 03	42	5
7 338 05	42	5
7 338 10	42	5
7 338 12	42	5
7 338 16	42	5
7 338 19	42	5
7 338 21	42	5
7 338 30	43	5
7 338 31	43	5
7 338 32	43	5
7 338 33	43	5
7 338 34	43	5
7 338 35	43	5
7 338 36	43	5
7 338 37	43	5
7 338 40	42	5
7 338 41	42	1

Cat. Nos	Page No	Pack
7 338 50	42	5
7 338 51	42	5
7 338 56	42	1
7 338 57	42	1
7 338 60	43	5
7 338 61	43	5
7 338 65	43	5
7 338 70	43	5
7 338 71	43	5
7 338 75	43	5
7 338 88	43	5
7 338 89	43	5
7 338 91	42	5
7 338 92	42	5
7 338 93	42	5
7 338 94	42	5
7 338 95	42	5
7 338 96	42	5
7 338 97	43	1
7 338 98	43	1
7 339 82	45	1
7 339 83	45	1
7 339 84	45	1
7 339 85	45	1
7 339 86	45	1
7 339 87	45	1
7 339 91	44	1
7 339 92	44	1
7 339 93	44	1
7 339 94	44	1
7 341 90	41	1
7 341 98	41	10
7 341 99	41	10
7 342 07	37	1
7 342 10	37	1
7 342 12	37	1
7 342 16	37	1
7 342 19	40	1
7 342 23	37	1
7 342 26	40	1
7 342 29	40	1
7 342 32	40	1
7 342 34	40	1
7 342 37	38	1
7 342 41	38	1
7 342 43	38	1
7 342 46	37	1
7 342 47	37	1
7 342 50	38	1
7 342 51	38	1
7 342 52	41	1
7 342 54	38	1
7 342 56	38	1
7 342 57	38	1
7 342 59	39	1
7 342 60	39	1
7 342 61	39	1
7 342 65	39	1
7 342 69	39	1
7 342 70	39	1
7 342 71	39	1

Cat. Nos	Page No	Pack
7 342 75	39	1
7 342 89	39	1
7 342 90	40	1
7 342 91	41	1
7 342 92	41	1
7 342 93	41	1
7 342 94	41	1
7 342 95	40	1
7 342 96	40	1
7 343 31	37	1
7 343 32	37	1
7 343 33	37	1
7 343 34	37	1
7 343 82	45	1
7 343 83	45	1
7 343 91	44	1
7 343 92	44	1
7 343 93	44	1
7 343 94	44	1
7 346 07	37	1
7 346 10	37	1
7 346 12	37	1
7 346 14	37	1
7 346 19	40	1
7 346 23	37	1
7 346 26	40	1
7 346 29	40	1
7 346 32	40	1
7 346 34	40	1
7 346 37	40	1
7 346 40	38	1
7 346 41	38	1
7 346 43	38	1
7 346 46	37	1
7 346 47	37	1
7 346 50	38	1
7 346 51	38	1
7 346 52	41	1
7 346 54	38	1
7 346 56	38	1
7 346 57	38	1
7 346 59	39	1
7 346 60	39	1
7 346 61	39	1
7 346 65	39	1
7 346 69	39	1
7 346 70	39	1
7 346 71	39	1
7 346 75	39	1
7 346 89	39	1
7 346 90	40	1
7 346 91	41	1
7 346 92	41	1
7 346 93	41	1
7 346 94	41	1
7 346 95	40	1
7 346 96	40	1
7 347 31	37	1
7 347 32	37	1
7 347 33	37	1
7 347 34	37	1
7 347 82	45	1
7 347 83	45	1

Cat. Nos	Page No	Pack
7 347 91	44	1
7 347 92	44	1
7 347 93	44	1
7 347 94	44	1
7 350 30	47	10
7 350 60	47	10
7 350 62	47	10
7 351 30	47	10
7 351 60	47	10
7 351 62	47	10
7 352 56	47	10
7 352 65	47	10
7 353 56	47	10
7 353 65	47	10
7 354 00	47	10
7 354 01	47	10
7 354 03	47	10
7 354 05	47	10
7 354 06	47	10
7 354 07	47	10
7 354 10	47	10
7 354 11	47	10
7 354 12	47	10
7 354 13	47	10
7 354 14	47	10
7 354 15	47	10
7 354 16	47	10
7 354 17	47	10
7 354 18	47	10
7 354 20	47	10
7 354 21	47	10
7 354 22	47	10
7 354 23	47	10
7 354 24	47	10
7 354 25	47	10
7 354 36	47	20
7 354 40	47	10
7 354 41	47	10
7 354 46	47	1
7 354 47	47	1
7 354 48	47	1
7 354 50	47	1
7 354 51	47	1
7 354 74	22	10
7 354 76	22	15
7 354 81	44	10
7 354 82	44	10
7 354 90	44	10
7 354 91	44	10
7 354 92	44	10
7 354 93	45	10
7 354 95	44	10
7 354 96	44	10
7 355 00	47	10
7 355 01	47	10
7 355 03	47	10
7 355 05	47	10
7 355 06	47	10
7 355 07	47	10
7 355 10	47	10
7 355 11	47	10

Cat. Nos	Page No	Pack
7 355 12	47	10
7 355 13	47	10
7 355 14	47	10
7 355 15	47	10
7 355 16	47	10
7 355 17	47	10
7 355 18	47	10
7 355 20	47	10
7 355 21	47	10
7 355 22	47	10
7 355 23	47	10
7 355 24	47	10
7 355 25	47	10
7 355 36	47	20
7 355 40	47	10
7 355 41	47	10
7 355 46	47	1
7 355 47	47	1
7 355 48	47	1
7 355 50	47	1
7 355 51	47	1
7 364 00	44	10
7 364 01	44	5
7 364 06	23	10
7 364 07	23	10
7 364 10	23	5
7 364 11	23	5
7 364 13	23	5
7 364 18	45	1
7 364 22	45	1
7 364 28	45	1
7 364 32	45	1
7 395 00	46	10
7 395 01	46	10
7 395 03	46	10
7 395 04	46	10
7 395 07	46	10
7 395 08	46	10
7 396 79	46	10
7 396 80	46	10
7 396 82	46	10
7 396 83	46	10
7 396 92	46	10
7 396 93	46	10
7 398 21	46	1
7 398 23	46	1
7 398 24	46	1
7 398 28	46	1
7 398 33	46	1
7 398 39	46	1
7 398 61	46	1
7 398 63	46	1
7 398 64	46	1
7 398 68	46	1
7 398 73	46	1
7 398 79	46	1

LEGRAND IN THE AREA

CYPRUS

Tel: (+357) 22 318 588
Fax: (+357) 22 318 588

IRAQ

Tel: (+964) 770 781 2020

JORDAN

142, Arar Street
Wadi Saqra
P.O. Box 501
Amman 11118
Tel: (+962) 6465 5902
Fax: (+962) 6465 5903

KUWAIT

Shuwaikh
Safat 13002
P.O. Box 177
Tel: (+965) 9781 3718
Fax: (+965) 2482 4754

LEBANON

Achrafieh 5585 Building - 6th floor
P. Gemayel Avenue
Aadlieh
Beirut
Tel: (+961) 1 422 166
Fax: (+961) 1 422 1676

OMAN

Tradelinks & Services Co.
Honda Road - Ruwi
Muscat - PC 112
Tel: (+968) 24 83 2280
Fax: (+968) 24 83 1596

QATAR

Dr. Fahed Ben Thani Building
C Ring Road
P.O. Box 150
Doha
Tel: (+974) 4456 9083
Fax: (+974) 4465 9916

SAUDI ARABIA

Riyadh

New Akariah Center
Tower 4 - 8th Floor
Siteen Street - Malaz Area
P.O. Box 325099
Riyadh 11371
Tel: (+966) 1 478 84 36
Fax: (+966) 1 478 98 76

Al Khobar

Al-Khobar Mall - 2nd Floor
Office 362 - P.O. Box 927
Al Khobar 31952
Tel: (+966) 3 887 89 50
Fax: (+966) 3 887 89 52

Jeddah

Arabian Business Center
Wali Al-Ahad Road - Rowais Area
P.O. Box 51712
Jeddah 21553
Tel: (+966) 2 651 28 48
Fax: (+966) 2 651 74 34

UNITED ARAB EMIRATES

Dubai & Northern Emirates

Wing C - Office 701 - Dubai Silicon Oasis
P.O. Box 341068
Dubai
Tel: (+971) 4 3821 821
Fax: (+971) 4 3821 822

Abu Dhabi

Salam Building - Salam Street
P.O. Box 110274
Abu Dhabi
Tel: (+971) 2 6769 696
Fax: (+971) 2 3821 822



FOLLOW US
ALSO ON

@ www.legrand.com

 www.youtube.com/legrand

 twitter.com/@legrand



World Headquarters

and International Department
87045 Limoges Cedex - France
☎ : + 33 (0) 5 55 06 87 87
Fax: + 33 (0) 5 55 06 74 55