

Mosaic™ Programme plates



Selection chart for boxes, supports and plates **p. 882-883**

Pack	Cat.Nos	Plates
10 5	0 788 01 0 790 01	For 1 module ○ White - Clips onto support Cat.No 0 802 50 ● Alu - Clips onto support Cat.No 0 802 50
10	0 788 11	○ White - 80 x 80 mm. Clips onto supports Cat.Nos 0 802 51/60/61/62/69
10	0 790 11	● Alu - 80 x 80 mm. Clips onto supports Cat.Nos 0 802 51/60/61/62/69
10 10 10 5	0 788 02 0 790 02 0 787 22 0 788 80	For 2 modules Clips onto supports Cat.Nos 0 802 51/60/61/62/69 ○ White ● Alu ○ White antimicrobial ○ White antibacterial. IP44 weatherproof Equipped with a membrane which can receive Mosaic™ Programme control and connection functions (cannot be mounted on surface-mounting boxes)
10 5	0 788 03 0 790 03	For 3 modules Clips onto support Cat.No 0 802 59 ○ White ● Alu
10 5 10	0 788 14 0 790 14 0 787 24	For 4 horizontal modules Clips onto supports Cat.Nos 0 802 52/58 ○ White ● Alu ○ White antimicrobial
10 5	0 788 15 0 790 15	For 5 horizontal modules Clips onto supports Cat.Nos 0 802 52/58 ○ White ● Alu
10 5	0 788 25 0 790 25	For 5 vertical modules Clips onto supports Cat.Nos 0 802 52/57 ○ White ● Alu
10 5 10	0 788 04 0 790 04 0 787 25	For 2 x 2 horizontal modules Clips onto supports Cat.Nos 0 802 52/57 or 2 x 802 51 ○ White ● Alu ○ White antimicrobial

Pack	Cat.Nos	Plates (continued)
10 5 10	0 788 22 0 790 22 0 787 23	For 2 x 2 vertical modules Clips onto supports Cat.Nos 0 802 52/57 or 2 x 0 802 51 ○ White ● Alu ○ White antimicrobial
10 10 10	0 788 16 0 790 16 0 787 26	For 6 horizontal modules Clips onto supports Cat.No 0 802 53 ○ White ● Alu ○ White antimicrobial
10 5	0 788 18 0 790 18	For 8 horizontal modules Clips onto support Cat.Nos 0 802 53 or 3 x 0 802 51 ○ White ● Alu
10 5	0 788 06 0 790 06	For 3 x 2 horizontal modules Clips onto support Cat.Nos 0 802 53 or 3 x 0 802 51 ○ White ● Alu
10 5	0 788 23 0 790 23	For 3 x 2 vertical modules Clips onto support Cat.Nos 0 802 53 or 3 x 0 802 51 ○ White ● Alu
10 5	0 788 10 0 790 10	For 10 vertical modules Clips onto supports Cat.No 0 802 54 ○ White ● Alu

Mosaic™ Programme supports



Selection chart for boxes, supports and plates **p. 882-883**

Pack	Cat.Nos	Supports with site protection
10	0 802 50	For 1 module
10	0 802 51	For 2 modules
10	0 802 61	For 2 modules with clips or claws (length 27 mm)
10	0 802 69	For 2 modules with long clips (length 37 mm)
5	0 802 59	For 3 modules
10	0 802 52	For 4, 5 or 2 x 2 modules, horizontal or vertical
5	0 802 53	For 6, 8 or 3 x 2 modules horizontal or vertical
5	0 802 54	For 10 or 4 x 2 modules
5	0 802 64	For 2 x 4 or 2 x 2 x 2 modules Without site protection
5	0 802 66	For 2 x 6, 2 x 8 or 2 x 3 x 2 modules Without site protection
5	0 802 68	For 2 x 10 modules Without site protection

NEW Blanking plates for Batibox supports		
10	0 791 04	For supports Cat.Nos 0 802 52/58/64 4 modules
10	0 791 06	For supports Cat.Nos 0 802 53/66 6 modules
10	0 791 10	For supports Cat.Nos 0 802 54 10 modules

Pack	Cat.Nos	Other supports for Italian type boxes supplied with screws
10	0 802 13	3 modules
5	0 802 14	4 modules
5	0 802 16	6 modules
Illuminated supports		
Equipped with a ring of low consumption LEDs (0.3 kWh per year in continuous use) to create an illuminated halo effect through the finishing plate		
1	0 802 60	For 2 modules Power: 0.03 W Ideal for illumination function
1	0 802 62	For 2 modules Power: 1.4 W Ideal for indicator function
1	0 802 57	For 5 or 2 x 2 vertical modules Power: 0.03 W Illumination function
1	0 802 58	For 4, 5 or 2 x 2 horizontal modules Power: 0.03 W Illumination function
Thin wall supports		
Narrow 1 module		
For mounting on box Cat.No 0 800 10		
10	0 802 90	○ White
10	0 802 94	● Alu
Narrow 2 modules		
For mounting on 1 box Cat.No 0 800 11		
10	0 802 91	○ White
10	0 802 95	● Alu
Narrow 2 x 1 module, vertical		
For mounting on 2 boxes Cat.No 0 800 10		
10	0 802 92	○ White

Red catalogue numbers: New products

Mosaic™ Programme
workstation kits
flush-mounting or surface-mounting

NEW



0 788 73 0 790 83

Ready-to-use kits to be equipped with low current and high current Mosaic™ Programme sockets (p. 866 to 875)
Halogen free

Pack	Cat.Nos	Flush-mounting workstation kits
		To be installed with flush-mounting conduits Equipped with: - multi-materials flush-mounting box, depth 50 mm, with adjustable cable entries Ø 20 and 25 mm - 4-module independent supports for tool-less installation of Mosaic Programme mechanisms (2 optional screws supplied) - removable spacer for integration of 1-module mechanisms - separation partition for high currents and low currents
1 1	0 788 72 0 790 72	For 2 x 4 modules White Alu
1 1	0 788 73 0 790 73	For 3 x 4 modules White Alu
1 1	0 788 74 0 790 74	For 4 x 4 modules White Alu

		Surface-mounting workstation kits
		To be installed with flush or surface-mounting conduits (mini-trunking or trunking) Equipped with: - surface-mounting frames with removable entries (top/bottom and sides), pre-cut for 40 x 20 mini-trunking - 4-module individual supports for tool-less installation of Mosaic Programme mechanisms (2 optional screws supplied) - removable spacer for integration of 1-gang mechanisms - separation partition for high currents and low currents
1 1	0 788 82 0 790 82	For 2 x 4 modules White Alu
1 1	0 788 83 0 790 83	For 3 x 4 modules White Alu
1 1	0 788 84 0 790 84	For 4 x 4 modules White Alu

5 1	0 801 29 0 788 40	Accessories for installation of modular devices Din-rail type for 2-module modular device 17.5 mm Cover plate for 2-module modular device 17.5 mm With removable transparent protection cap, 4 modules
--------	----------------------	--

supports, plates and boxes for Mosaic™

		UNIVERSAL SUPPORTS		OTHER SUPPORTS ITALIAN STANDARD		MOSAIC PLATES (IP 44, see p. 878)		SURFACE MOUNTING BOXES		DRY PARTITIONS		MASONRY						MULTI-MATERIALS			
										Batibox		Batibox		Universal boxes		Italian type					
										Standard	Depth (mm)	Cat. Nos	Depth (mm)	Cat. Nos	Depth (mm)	Cat.Nos	Depth (mm)			Cat. Nos	Depth (mm)
	1 module		0 802 50				0 788 01 0 790 01			40		0 800 40	40		0 801 40	(without screws)					
	2 modules		0 802 51 0 802 60 (illuminated) 0 802 62 (indicator) 0 802 61/69 (clip-mounting)				0 788 02 0 790 02		0 802 80 0 802 81	30 40		0 800 41 0 800 51 0 800 61	40 50 60		0 801 41 0 801 51	40		0 313 01	50		0 892 39
	3 modules		0 802 59 (with claws)		0 802 13		0 788 03 0 790 03		0 802 89	40		0 800 49	40		0 801 49						
	4 modules				0 802 14		0 788 14 0 790 14											50		0 892 49	
	5 modules			0 802 58 (illuminated)			0 788 15 0 790 15		0 802 85	40											
	2 x 2 modules						0 788 04 0 790 04				40					2 x 0 801 41	40		2 x 0 313 01		
	5 modules	0 802 52					0 788 25 0 790 25		0 802 82	40			50		2 x 0 801 51						
	2 x 2 modules			0 802 57 (illuminated)			0 788 22 0 790 22							40		2 x 0 313 01					
	6 modules				0 802 16		0 788 16 0 790 16											50		0 892 50	
	8 modules						0 788 18 0 790 18		0 802 86	40											
	3 x 2 modules		0 802 53				0 788 06 0 790 06			40 50		0 800 43 0 800 53	40 50		3 x 0 801 41 3 x 0 801 51	40		3 x 0 313 01			
	3 x 2 modules						0 788 23 0 790 23		0 802 83	40				40		3 x 0 313 01					
	10 modules		0 802 54				0 788 10 0 790 10		0 802 84	40		0 800 44 0 800 54	40 50		4 x 0 801 41 4 x 0 801 51	40		4 x 0 313 01			
	4 x 2 modules						0 788 08 0 790 08														
	2 x 5 modules		0 802 64				0 788 30 0 790 30		0 802 74	50									50		0 801 24
	2 x 2 x 2 modules						0 788 38 0 790 38														
	2 x 6 modules						0 788 36 0 790 36														
	2 x 8 modules		0 802 66				0 788 37 0 790 37		0 802 76	50									50		0 801 26
	3 x 2 x 2 modules						0 788 32 0 790 32														
	2 x 10 modules		802 68				0 788 28 0 790 28		0 802 78	46									50		0 801 28


Red catalogue numbers: New products

Mosaic™ and Celiane™ Universal support frames


Cat. No(s): 802 50/51/52/53/54/59/61/64/66/68/69



802 50



802 51



802 64







1. USE

Universal metal support frames for mounting Mosaic and Celiane mechanisms
 Supplied with worksite protection cover.

2. RANGE

	Designation	Cat. No.	Number of modules/gangs	Fixing method	Weight (g)
	1-module support frame	802 50	1 module	with screws	14.23
	1-gang support frame	802 51	1-gang 2 modules	with screws	24.74
	2-gang support frame	802 52	2-gangs 4/5 modules	with screws	58.83
	3-gang support frame	802 53	3-gangs 6/8 modules	with screws	86.95
	4-gang support frame	802 54	4-gangs 10 modules	with screws	116.29
	3-module support frame	802 59	3 modules	with screws	47.65
	1-gang support frame	802 61	1-gang 2 modules	à griffes standard	36.48
	1-gang support frame	802 69	1-gang 2 modules	à griffes longues	39.40
	2 x 2-gang support frame	802 64	2 x 2-gangs 2 x 4/5 modules	with screws	187.77
	2 x 3-gang support frame	802 66	2 x 3-gangs 2 x 6/8 modules	with screws	268.00
	2 x 10-module support frame	802 68	2 x 10 modules	with screws	290.90


3. MOSAIC™ PREPARATION

Use with:	4 modules	2 x 2 modules	5 modules
	Remove the spacer 791 04 Centre the modules Use plates 788 14 - 790 14 	Use plates 788 04 - 790 04 788 22 - 790 22 	Remove the spacer Centre the modules Use plates 788 15 - 790 15 788 25 - 790 25 
Use with:	6 modules	3 x 2 modules	5 modules
	Remove the spacer Clip the blanking plates 791 06 Centre the modules Use plates 788 16 - 790 16 	Use plates 788 06 - 790 06 788 23 - 790 23 	Remove the spacers Centre the modules Use plates 788 18 - 790 18 
Use with:	10 modules	4 x 2 modules	
	Remove the spacers Clip the blanking plates 791 10 Centre the modules Use plates 788 10 - 790 10 	Use plates 788 08 - 790 08 	
Use with:	2 x 5 modules	2 x 2 x 2 modules	
	Remove the spacers Use plates 788 30 - 790 30 	Use plates 788 38 - 790 38 	
Use with:	2 x 6 modules	2 x 3 x 2 modules	2 x 8 modules
	Remove the spacers Centre the modules Use plates 788 36 - 790 36 	Use plates 790 32 	Remove the spacers Centre the modules Use plates 788 37 - 790 37 
Use with:	2 x 10 modules		
	Use plates 788 28 - 790 28 		

Mosaic™ and Celiane™ Universal support frames

Cat. No(s): 802 50/51/52/53/54/59/61/64/66/68/69

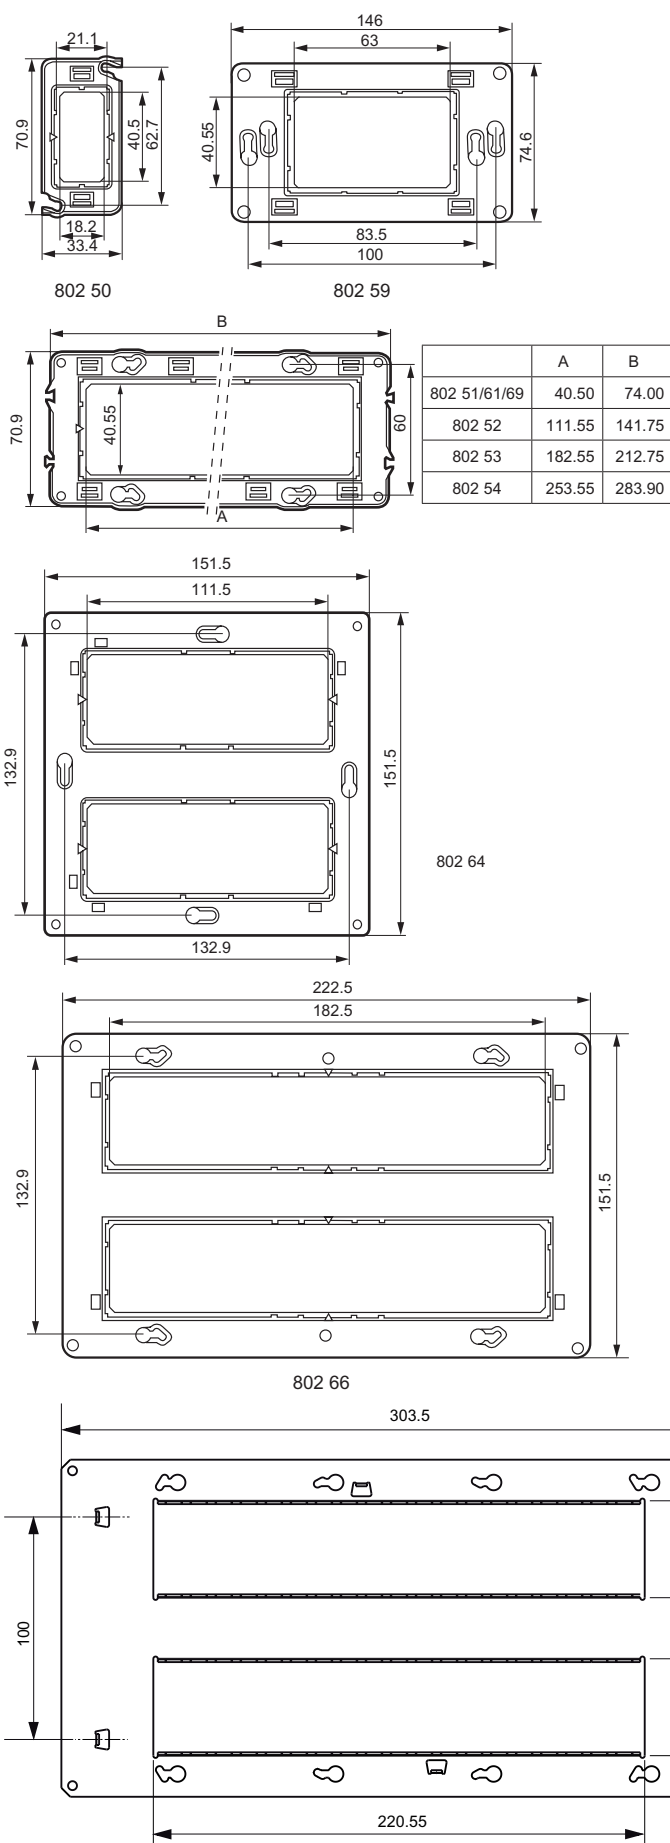4. OVERALL DIMENSIONS



5. MOUNTING

The support frames are screwed or claw-fitted to flush-mounting boxes.

6. TECHNICAL CHARACTERISTICS

6.1 Material characteristics

Galfan steel + polyamide 6.6 support frames

6.2 Electrical characteristics

Self-extinguishing: 650°C / 30 s

6.3 Climatic characteristics

Storage temperature: - 10° C to + 70° C

Operating temperature: - 5° C to + 50° C

7. ACCESSORIES

For 2, 3 and 4-gang mechanisms, use the blanking plates for use with 4, 6 and modules.

	Blanking plates
4-module plates	791 04
6-module plates	791 06
10-module plates	791 10

